



# RESIDENTIAL H110-TF Heat Recovery Ventilator

PRODUCT  
SPECIFICATIONS  
& TECHNICAL  
DATA



## PRODUCT DESCRIPTION

The H110-TF heat recovery ventilator produces approximately **95 CFM** at 0.20 in.w.g (ESP) and recovers heat through its high-efficiency polypropylene core. The H110-TF has been thoughtfully engineered for simple installation in apartments, condos, and small houses. The removable collars are top-mounted, which makes the unit both narrow and shallow enough to fit inside standard closets and other tight spaces.

The H110-TF has two exclusive features. EvacMAX™ provides on-demand boost for maximum ventilation. With FLEXControl, airflow circuits can be calibrated electronically, eliminating the need for resistance-inducing balancing dampers and improving overall efficiency.

## KEY FEATURES

- Electronically and independently adjustable supply and exhaust blowers (FLEXControl)
- Gauge ports on the door for fast and reliable airflow readings
- Twist-in collars for easy flex-duct attachment
- Non-dust-loading backward-inclined impellers on totally enclosed motors
- Easy access to core and filters for cleaning
- Extremely durable polypropylene core
- Optimal high efficiency filters
- Multiple low-cost controller options
- Automatic exhaust defrost protects the core from frost build-up

## CASING

Material: Pre-painted 24-gauge galvanized steel  
Drain Connection: Ø 3/8" (Ø 10 mm)  
Duct Diameter: Ø 4" (Ø 102 mm)  
Insulation: Molded EPS  
Width: 23-1/8" (587 mm)  
Height: 16-3/4" (425 mm)  
Depth: 12-3/8" (314 mm)  
Weight: 29 lbs (13 kg); Shipping Weight: 37 lbs (17 kg)

## MOUNTING

- Suspended by chains with vibration-isolating springs
- Wall-mounting accessory available (P/N 608575)

## RECOVERY CORE

Material: Polypropylene

## BLOWERS

Quantity: 2  
Type: Motorized impellers (backward-inclined)

## ELECTRICAL REQUIREMENTS

120 VAC, 60 Hz, 0.6 A, 72 W  
Cord Set: 48" (1219 mm) with ground

## CONTROLS

Low voltage dry contact (24VAC) for:

- Fan interlock (NO and NC)
- Digital Multifunction Control (P/N 611242)»
- LCD Electronic Multifunction Control (P/N 611227)
- Humidity Control (P/N 611224)
- Speed Control (Low/Intermittent/High) (P/N 611229)
- 20/40/60 Minute Timer (P/N 611228)

## FROST CONTROL

- Automatic timed integral exhaust defrost
- Activated by a sensor when the outdoor temperature drops below 23°F (-5°C)

## FILTERS

Quantity: 2  
Type: MERV 6 (P/N 612409)  
Optional : High efficiency MERV13 (P/N 612410)

## WARRANTY

Core Assembly: Limited lifetime warranty  
All Other Covered Components: Limited 5-year warranty


## APPROVALS

Meets Standards:  
• C22.2 no113  
• UL 1812




# Dimensions


**TOP VIEW**

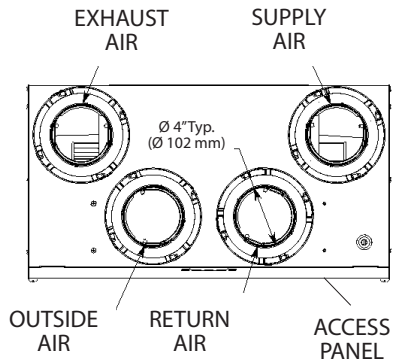

**SIDE VIEW**

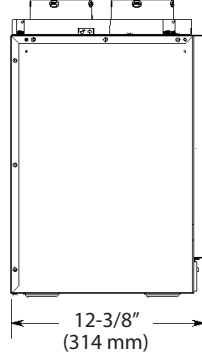


**FRONT VIEW**

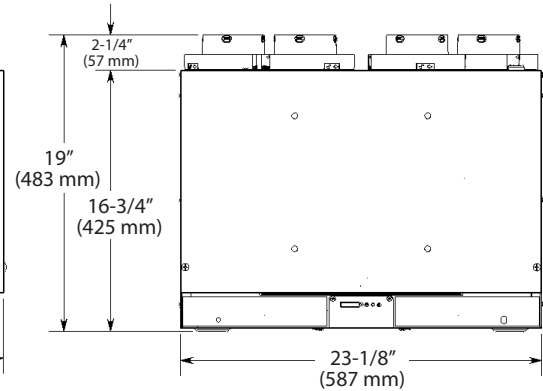

# Performance

**H110-TF  
Ventilation Performance**

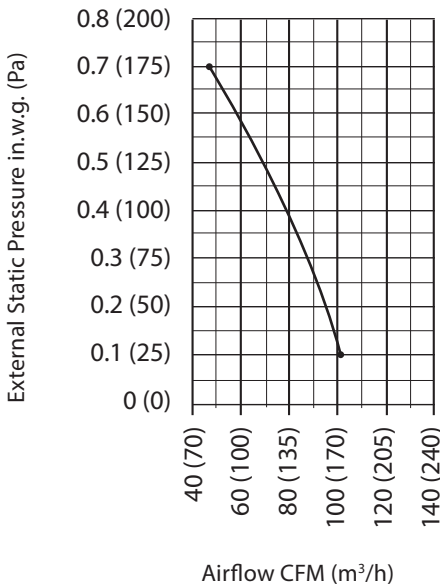

Energy Performance						
Supply Temperature		Net Airflow		Power Consumed (W)	Sensible Recovery Efficiency	Adjusted Sensible Recovery Efficiency
°F	°C	CFM	L/s			
32	0	40	19	26	64%	70%
32	0	65	31	34	62%	67%
32	0	85	40	56	60%	66%
-13	-25	43	20	91	54%	77%



<b>Project:</b>		<b>Architect:</b>	
<b>Location:</b>		<b>Engineer:</b>	
<b>Model #:</b>		<b>Contractor:</b>	
<b>Quantity:</b>		<b>Comments:</b>	
<b>Submitted By:</b>			
<b>Date:</b>			

2019 ALDES Canada. Reproduction or distribution, in whole or in part, of this document, in any form or by any means, without the express written consent of ALDES Canada, is strictly prohibited. The information contained within this document is subject to change without prior written notice.