



AIRFLOW & ZONE CONTROLS

CAR-FSA-II

Constant Airflow Regulator with Integral Fire Damper for Supply Air Applications

PRODUCT
SPECIFICATIONS
& TECHNICAL
DATA



CAR-FSA-II Sleeve Assembly

Fire Damper

GENERAL

The model CAR-FSA-II Constant Airflow Regulator is a modulating orifice that automatically regulates airflows in duct systems to constant levels. The passive control element responds to duct pressure and requires no electric or pneumatic sensors or controls.

The CAR-FSA-II compensates for changes in duct pressure caused by thermal stack effect, building pressure, dust-clogged filters, etc. The CAR-FSA-II also provides a low-cost solution to balancing forced-air systems for heating, air conditioning, and ventilation, eliminating the need for on-site balancing. The CAR-FSA-II will regulate airflow in supply air duct systems.

The active control element of the CAR-FSA-II is a unique aerofoil (CAR-II). Using Bernoulli's Principle, the aerofoil damper lifts in response to increasing static pressure. This operation regulates the free-area opening through the control, resulting in maintenance of velocity and specific airflow set points. Each CAR-II is designed and produced for control of air in temperatures ranging from -25° to 140°F (-32° to 60°C.)

CONSTRUCTION

The round CAR-II regulating element is constructed of a UL94V-0 ABS plastic, and is UL 2043 safety classified and labeled for flame and smoke generation. The CAR-II is then mounted in a heavy-gauge galvanized steel sleeve designed to accommodate installation of curtain-type fire dampers. The fire damper is tested and listed per UL555 for use in wall or shaft applications, and it is rated for 2-hour protection. Three-hour fire dampers may also be used. Each sleeve is welded to prevent leakage. The assembly is sized to fit inside standard duct riser openings and chases. Each sleeve is designed to specifically accommodate the control element and prevent unwanted air leakage.

PERFORMANCE

The CAR-II controls airflow accurately to within 10% of rated flow (15% for units 50 CFM or less) throughout the target operating pressure range of 0.2 to 0.8 in. w.g. (50 to 200 Pa). Each CAR-II is factory tested and calibrated

to the rated set point before shipping. On-site field adjustment of airflow set points can be made for supply air applications (contact factory). Each CAR-II register is available in multiple factory-calibrated set points (see performance curves).


MAINTENANCE

The CAR-II needs no maintenance when used in normal conditions. There is no risk of dust deposit or obstruction because the CAR-II has no airways subject to clogging. If the intended application includes air heavily loaded with grease or dust, a fitting with an access panel or door, such as that used for flame dampers, should be provided.

WARRANTY

Guaranteed for 5 years, from date of shipment, against all defects in material or workmanship, provided that the material has been installed and utilized under normal conditions. This warranty is limited to the repair or replacement of the material.

CAR-FSA-II Dimensions

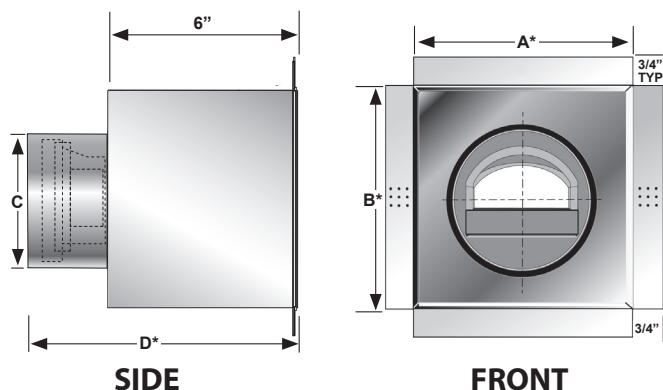


PART NUMBER	SLEEVE SIZE (NOMINAL)	CAR-II (NOMINAL)	A*	B*	C	D*
18 982	6" x 6"	4"	5.75"	5.75"	4"	9.5"
18 983	6" x 6"	5"	5.75"	5.75"	5"	10.5"
18 985	8" x 8"	4"	7.75"	7.75"	4"	9.5"
18 986	8" x 8"	5"	7.75"	7.75"	5"	10.5"
18 987	8" x 8"	6"	7.75"	7.75"	6"	10.5"
18 989	10" x 10"	4"	9.75"	9.75"	4"	9.5"
18 990	10" x 10"	5"	9.75"	9.75"	5"	10.5"
18 991	10" x 10"	6"	9.75"	9.75"	6"	10.5"
18 992	10" x 10"	8"	9.75"	9.75"	8"	10.5"
18 994	12" x 12"	4"	11.75"	11.75"	4"	9.5"
18 995	12" x 12"	5"	11.75"	11.75"	5"	10.5"
18 996	12" x 12"	6"	11.75"	11.75"	6"	10.5"
18 997	12" x 12"	8"	11.75"	11.75"	8"	10.5"
18 998	12" x 12"	10"	11.75"	11.75"	10"	10.5"

* Standard sizes shown. Sleeve assemblies are also available to accommodate any damper and grille size. Contact factory.

How the CAR-II Works

Constant airflow is achieved by controlling the free area through the device. At minimum static pressure, the aero-wing is parallel to the air stream. As the static pressure increases, the aero-wing lifts, reducing the amount of free area through the regulator. At the same time, higher static pressure increases the air velocity resulting in **CONSTANT AIRFLOW**. This occurs regardless of pressure differences in the range of 0.2 to 0.8 in. w.g. (50 to 200 Pa). The air velocity in the duct is in the range of 60 to 700 ft/min. (0.3 to 3.5 m/s).

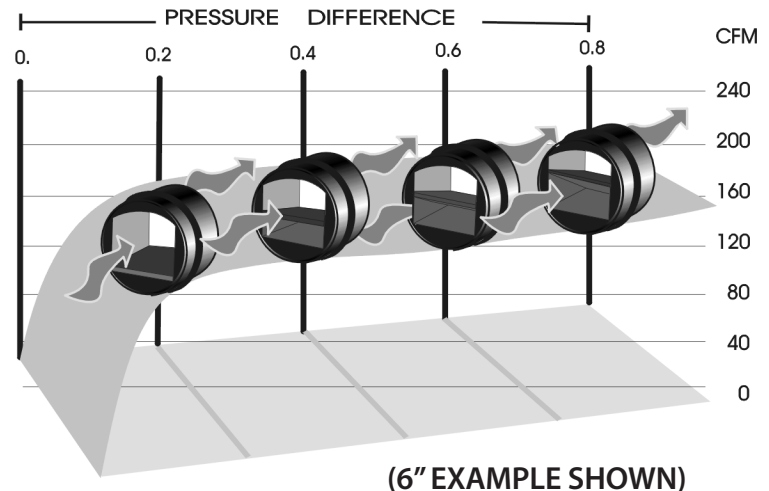

(6" EXAMPLE SHOWN)

Typical CAR-FSA-II Applications

- Supply air in offices.
- Balancing supply airflows in high-rise building duct risers.
- Regulation of make-up air.
- Balancing supply airflow from packaged roof-top A/C units.
- Balancing supply of heat recovery ventilation systems.

Typical Specification


Model CAR-FSA-II Constant Airflow Regulators by American ALDES Ventilation Corporation, Bradenton, Florida, shall solely operate on duct pressure and require no external power supply. Each regulator shall be pre-set and factory calibrated, requiring no field adjustment to the airflows as indicated on the schedule, and shall be rated for use in air temperatures ranging from -25° to 140°F (-32° to 60°C.)

Constant Airflow Regulators shall be capable of maintaining constant airflow within +/- 10% of scheduled flow rates (15% for units 50 CFM or less), within the operating range of 0.2 to 0.8 in. w.g. differential pressure. Regulators shall be provided as an assembly consisting of a 94V-0 UL ABS plastic body. All regulators must be classified per UL 2043 and carry the UL mark indicating compliance. The Constant Airflow Regulator assembly shall be mounted in a heavy-gauge galvanized steel sleeve with a curtain-type fire damper. The fire damper shall be tested and listed per UL555 for use in wall or shaft applications, and be rated for 2-hour protection. All Constant Airflow Regulators will require no maintenance and must be warranted for a period of no less than five years. Constant Airflow Regulators shall be installed in tight ducting systems in accordance with all applicable codes and manufacturer's instructions.


CAR-FSA-II Airflow Performance Data

Performance charts reflect airflow measurements taken at 68°F (20°C) at 1 atmosphere pressure. The CAR-FSA-II is designed for system pressures between 0.2 and 0.8 in. w.g.


4" DIAMETER (100 mm) REGULATING ELEMENT

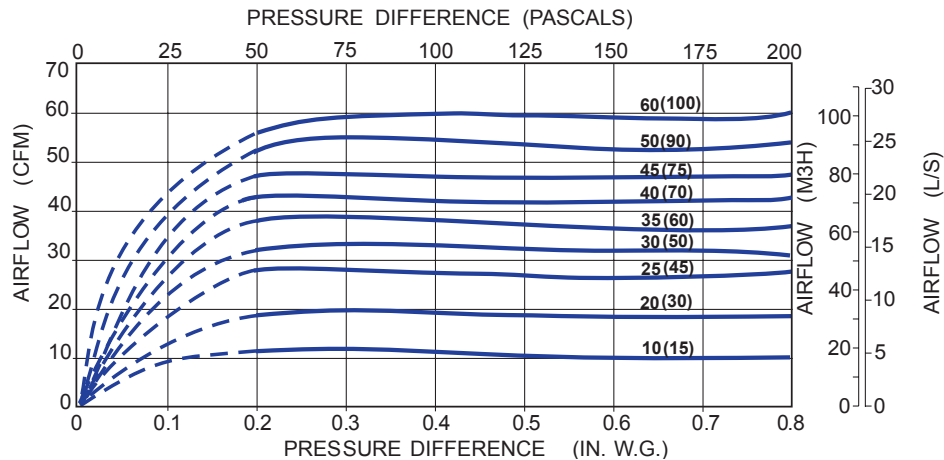

5" DIAMETER (125 mm) REGULATING ELEMENT

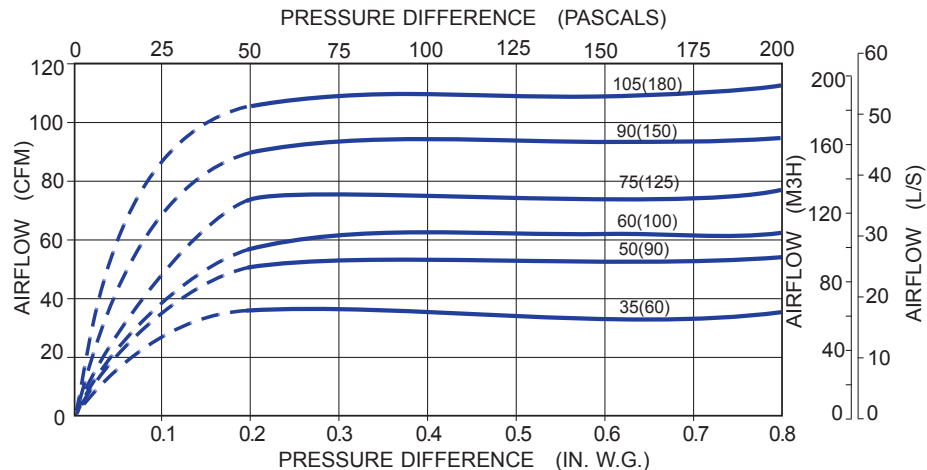


6" DIAMETER (150 mm) REGULATING ELEMENT

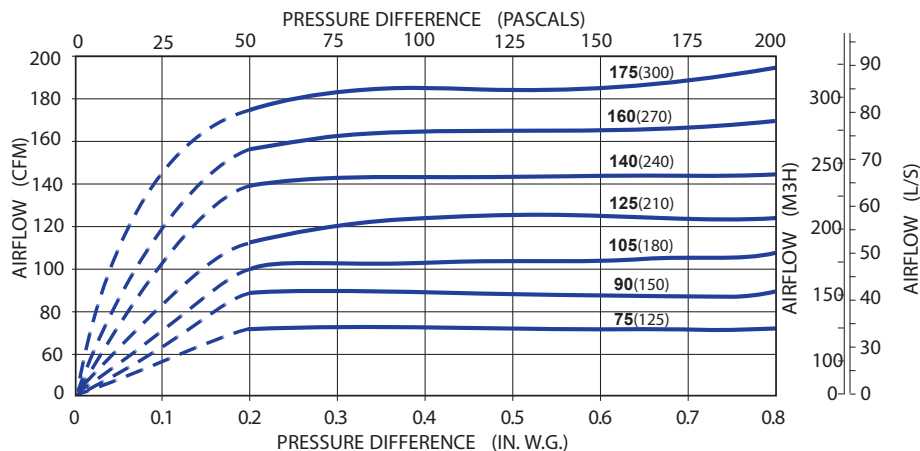

CAR-FSA-II Airflow Performance Data

Performance charts reflect airflow measurements taken at 68°F (20°C) at 1 atmosphere pressure. The CAR-FSA-II is designed for system pressures between 0.2 and 0.8 in. w.g.

8" DIAMETER (200 mm) REGULATING ELEMENT

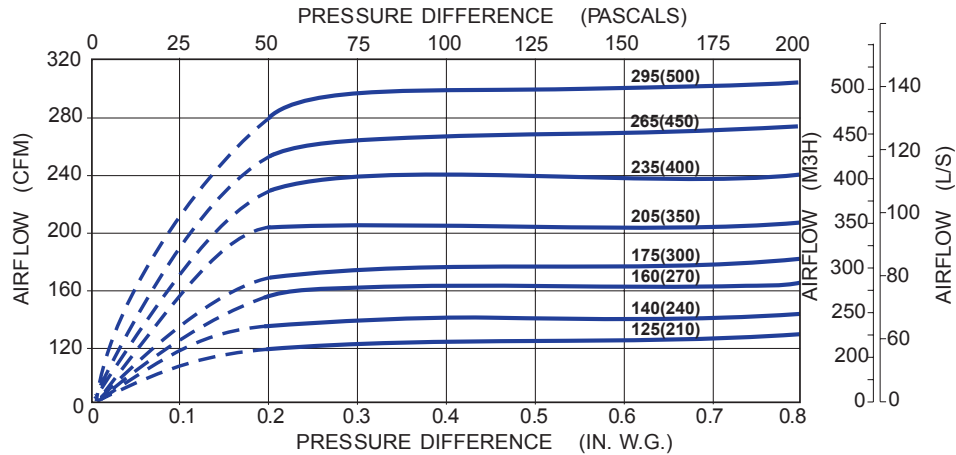

10" DIAMETER (250 mm) REGULATING ELEMENT

