



STANDARD RESIDENTIAL H190-TRG Heat Recovery Ventilator

PRODUCT
SPECIFICATIONS
& TECHNICAL
DATA



PRODUCT DESCRIPTION

Compact size, large performance – the H190-TRG heat recovery ventilator **exchanges 130 to 200 CFM at 0.4 in.w.g** (ESP) and recovers heat through its high-efficiency polypropylene core. The H190-TRG has been thoughtfully engineered for simple installation in almost any size home.

The H190-TRG has two exclusive features. EvacMAX™ provides on-demand boost for maximum ventilation. With FLEXControl, airflow circuits can be calibrated electronically, eliminating the need for resistance-inducing balancing dampers and improving overall efficiency.

KEY FEATURES

- ENERGY STAR® qualified (Canada)
- Electronically and independently adjustable supply and exhaust blowers (FLEXControl)
- Gauge ports on the door for fast and reliable airflow readings
- Removable top-mounted collars
- Twist-in collars for easy flex-duct attachment
- Non-dust-loading backward-inclined impellers on totally enclosed motors
- Easy access to core and filters for cleaning
- Extremely durable polypropylene core
- Optional high-efficiency filters
- Multiple low-voltage controller options
- Recirculating defrost to maintain neutral pressure in the home, and using only the four duct connections. No fifth duct connection required.

CASING

Material: Pre-painted 24-gauge galvanized steel
Drain Connection: 3/8"
Duct Diameter: 6"
Insulation: 1" Fiberglass with FSK
Width: 29-5/16"
Height: 19-7/16"
Depth: 15-11/16"
Weight: 50 lbs; Shipping Weight: 56 lbs
Supply Damper: Motorized; Exhaust Damper: Gravity

MOUNTING

Suspended by chains with vibration-isolating springs

RECOVERY CORE

Material: Polypropylene

BLOWERS

Quantity: 2
Type: Motorized impellers (backward-inclined)

ELECTRICAL REQUIREMENTS

120 VAC, 60 Hz, 1.8 A, 216 W
Cord Set: 48" with ground

CONTROLS

Low voltage (24VAC) for:

- LCD Electronic Multifunction Control (P/N 611227)
- Digital Multifunction Control (P/N 611242)
- Mode Control (Recirculation) (P/N 611230)
- Humidity Control (P/N 611224)
- Speed Control (Low/Intermittent/High) (P/N 611229)
- 20/40/60 Minute Timer (P/N 611228)

FROST CONTROL

- Automatic timed recirculation, fifth port
- Cycles controlled by a temperature sensor when outdoor temperature drops below 23°F (-5°C)

FILTERS

Quantity: 2
Type: Aluminum (P/N 612261)
Optional: Carbon (P/N 612262), MERV 6 (P/N 612408) or high-efficiency MERV 13 (P/N 612263)

WARRANTY

Core Assembly: Limited lifetime warranty
All Other Covered Components: Limited 5-year warranty


APPROVALS

Meets Standards:


- C22.2 no113 and UL 1812
- ENERGY STAR® qualified (Canada)




Dimensions

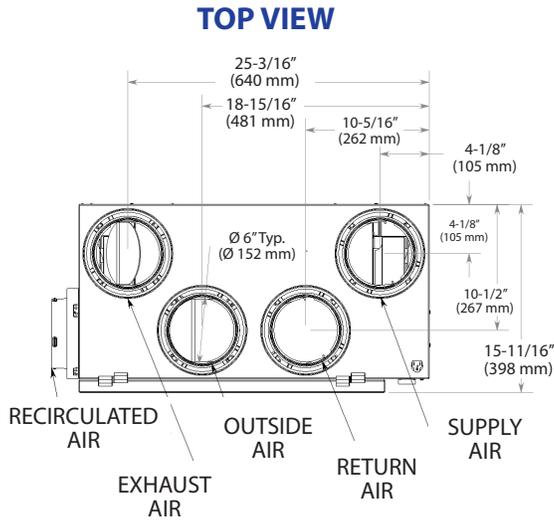


FRONT VIEW

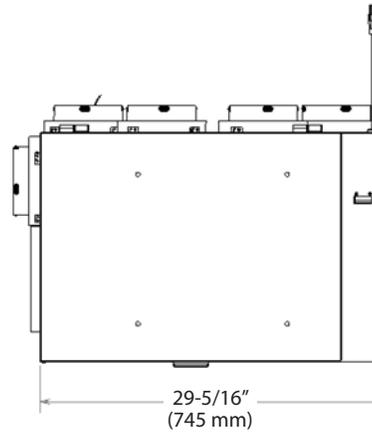

SIDE VIEW

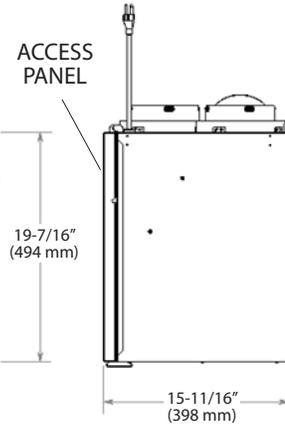

Performance

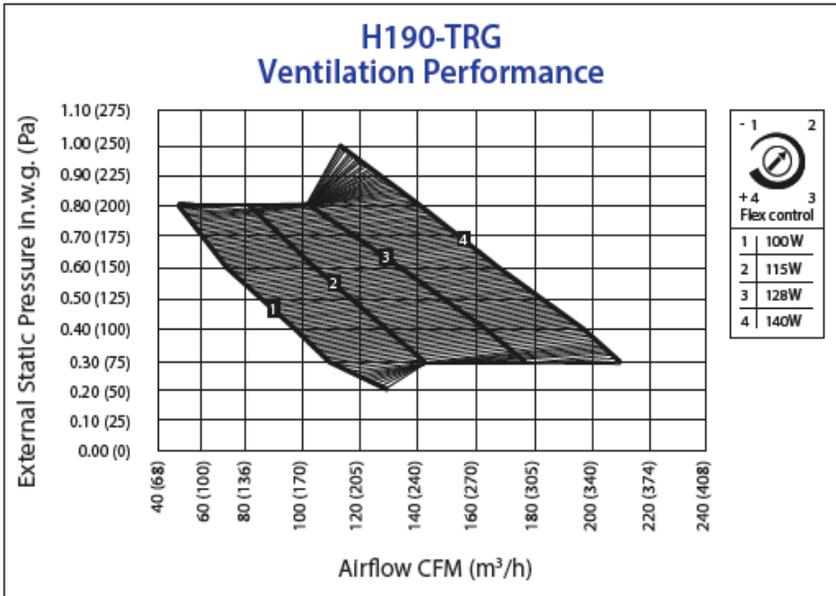

Energy Performance

Supply Temperature		Net Airflow		Power Consumed (W)	Sensible Recovery Efficiency	Apparent Sensible Effectiveness
°F	°C	CFM	L/s			
32	0	64	30	60	75%	83%
32	0	81	38	66	73%	81%
32	0	121	57	116	68%	76%
-13	-25	68	32	91	67%	83%



Project:		Architect:	
Location:		Engineer:	
Model #:		Contractor:	
Quantity:		Comments:	
Submitted By:			
Date:			

© 2017 American ALDES Ventilation Corporation. Reproduction or distribution, in whole or in part, of this document, in any form or by any means, without the express written consent of American ALDES Ventilation Corporation, is strictly prohibited. The information contained within this document is subject to change without prior written notice.