



# LIGHT COMMERCIAL H240-Ri Heat Recovery Ventilator

## PRODUCT SPECIFICATIONS & TECHNICAL DATA



### PLATE EXCHANGER

Standard: Polypropylene (sensible heat transfer)  
Quantity: 1  
Pitch: 0.10" (2.5 mm)  
Dimensions: 12" x 12" x 15"  
(305 mm x 305 mm x 381 mm)



### CASING

Material: Painted galvanized steel 24GA  
Insulation: 1" (25 mm) Fiberglass with FSK  
Drain Connection: Ø 3/8" (Ø 10 mm)  
Duct Diameter: 6" (152 mm)  
Width: 31" (787 mm)  
Height: 21-3/4" (552 mm)  
Depth: 17-1/16" (433 mm)  
Unit Weight: 62 lbs (28 kg)  
Shipping Weight: 70 lbs (32 kg)

### MOUNTING

Suspended by chains with vibration-isolating springs

### BLOWERS

Quantity: 2  
Type: Backward-inclined motorized impeller, direct-drive PSC, variable speed, external rotor

### FILTERS

Number: 2  
Type: Aluminum (P/N: 612266)  
Optional: Carbon (P/N: 612264), or High Efficiency/MERV13 Equivalent (P/N: 612265)

### ELECTRICAL REQUIREMENTS

120 VAC, 60 Hz, 2.1 A, 252 W  
Cord Set: 48" (1219 mm) with ground

### FROST CONTROL

Recirculation cycles controlled by a temperature sensor when outdoor temperatures fall below 23°F (-5°C).

### CONTROLS

Low-voltage (24 VAC) for:

- Digital Multifunction Control (P/N: 611242)
- Mode Control (P/N: 611230)
- Humidity Control (P/N: 611224)
- Speed Control (Low/Intermittent/High) (P/N: 611229)
- 20/40/60 Minute Timer (P/N: 611228)

### WARRANTY

Core Assembly: Limited lifetime warranty  
All Other Covered Components: Limited 5-year warranty

### PRODUCT DESCRIPTION

The H240-Ri heat recovery ventilator provides high-efficiency heat recovery in a compact, affordable package. The unit uses a robust, water-washable polypropylene core that can withstand a wide range of environmental conditions. The H240-Ri produces approximately **240 CFM** at 0.20 in.w.g (ESP), making it ideal for small commercial applications.

The H240-Ri has two exclusive features. EvacMAX™ provides on-demand boost for maximum ventilation. With FLEXControl, airflow circuits can be calibrated electronically, eliminating the need for resistance-inducing balancing dampers and improving overall efficiency.

### KEY FEATURES

- Electronically and independently adjustable supply and exhaust blowers (FLEXControl)
- Non-dust-loading backward-inclined impellers on totally enclosed motors
- Easy access to core and filters for cleaning
- Extremely durable polypropylene core
- Standard aluminum filters and optional carbon or high-efficiency/MERV 13 equivalent filters
- Multiple low-voltage controller options
- Recirculating defrost protects the core from freezing without putting the building into negative-pressure


### APPROVALS

Meets Standards:  
UL 1812 and C22.2 no113

Listed:




## Dimensions

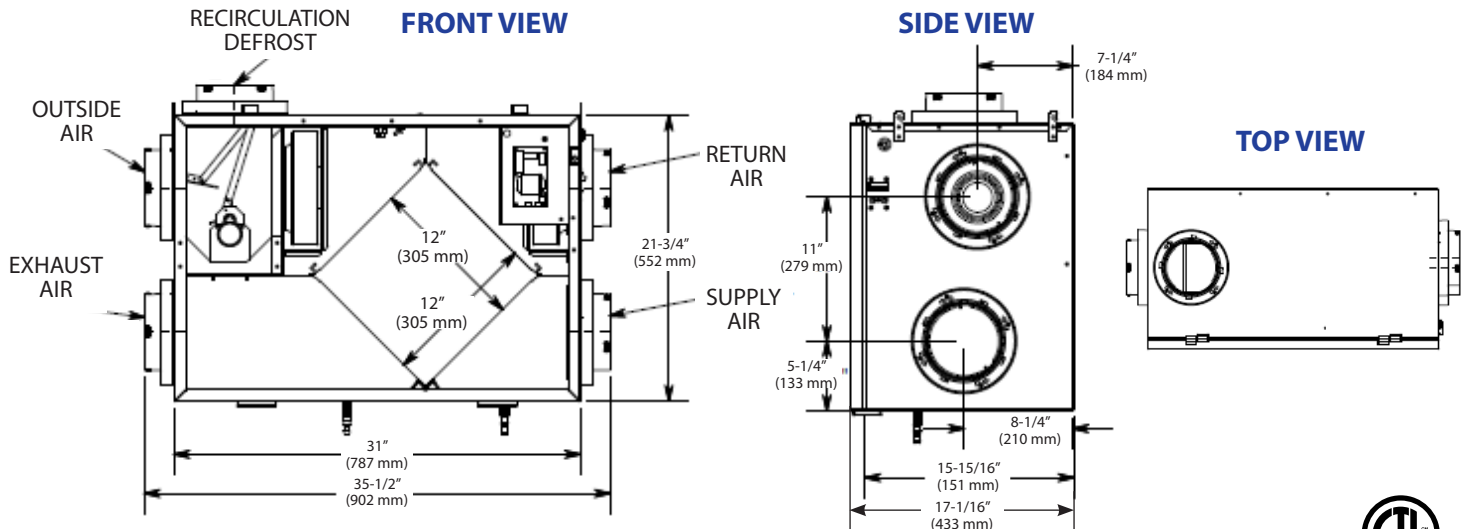


## Performance

**H240-Ri Ventilation Performance**

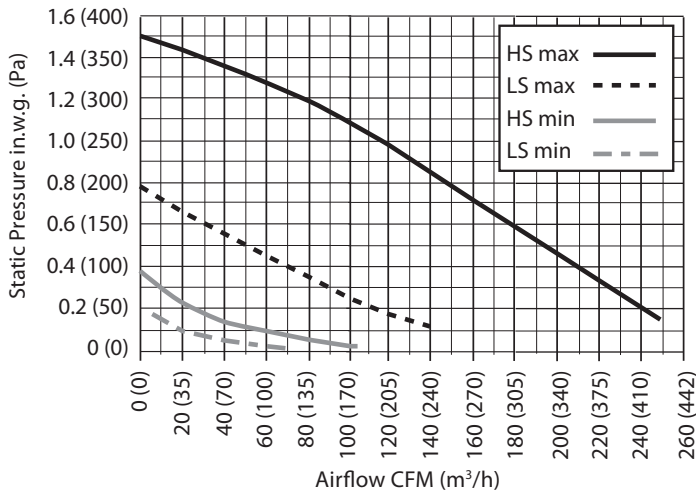

**H240-Ri Efficiency**

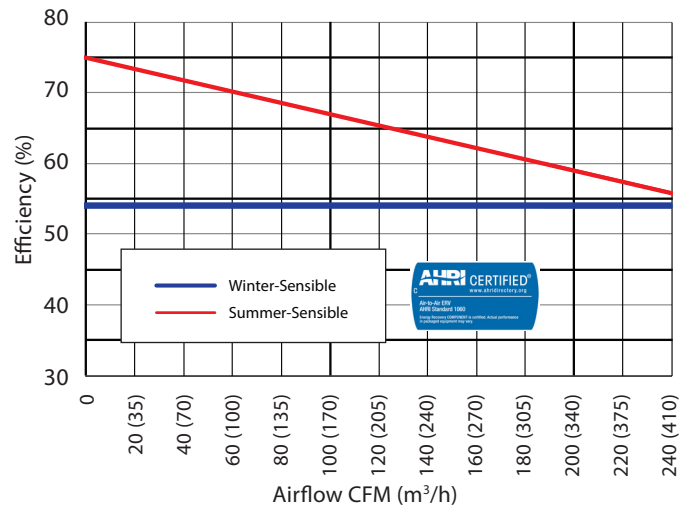

Project:		Architect:	
Location:		Engineer:	
Model #:		Contractor:	
Quantity:		Comments:	
Submitted By:			
Date:			

© 2016 American ALDES Ventilation Corporation. Reproduction or distribution, in whole or in part, of this document, in any form or by any means, without the express written consent of American ALDES Ventilation Corporation, is strictly prohibited. The information contained within this document is subject to change without prior written notice.