


In-line Lint Trap For Dryer Vents

INSTALLATION
OPERATION
MAINTENANCE

READ AND SAVE THESE INSTRUCTIONS

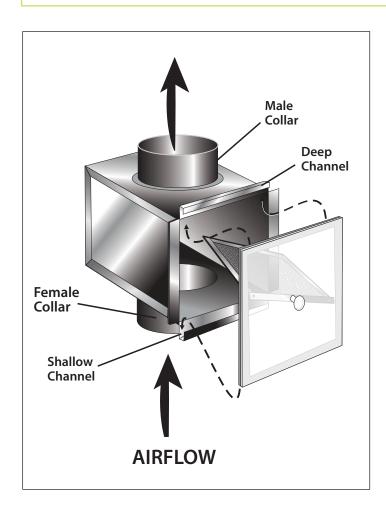

TO OPEN DOOR

Grasp knob, then push the door up or down (depending on orientation) into the deep channel. This will free the opposite edge from the shallow channel, allowing you to tilt the door forward and pull toward you.

WARNING

This secondary lint trap is intended for use when required in a Dryer Booster Fan application, as noted in the Dryer Booster Fan installation manual. Additionally, this secondary lint trap can be used in Dryer Booster Fan applications where excessive dryer lint is likely.

This secondary lint trap is not intended for use without a Dryer Booster Fan, unless the application is approved by the dryer manufacturer and/or the local building inspector.

INSTALLATION

CAUTION: Edges are sharp.

Lint traps are for drywall installation. They can be mounted in walls or ceilings. The duct should always be a male connection in the direction of airflow. The screen is angled so that lint accumulation is clearly visible through the door.

MAINTENANCE

Use a vacuum with an attachment to periodically remove lint build-up from unit interior.

WARRANTY

The entire unit is guaranteed for one (1) year, from date of shipment, against all manufacturing defects, provided the material has been installed and operated per manufacturer's instructions and under normal conditions. Warranty is limited to the repair or replacement of the material upon its return freight paid to our factory. This warranty is not transferable and is limited to the original end user.

© 2017 American ALDES Ventilation Corporation. Reproduction or distribution, in whole or in part, of this document, in any form or by any means, without the express written consent of American ALDES Ventilation Corporation, is strictly prohibited. The information contained within this document is subject to change without prior written notice.