



LIGHT COMMERCIAL H1800A-Fi-EC & H1800A-Ri-EC Heat Recovery Ventilator 400-2150 CFM Range

PRODUCT
SPECIFICATIONS
& TECHNICAL
DATA



H1800A-Fi-EC & H1800A-Ri-EC

The H1800A-Fi-EC and H1800A-Ri-EC heat recovery ventilators provide up to 2150 CFM of fresh outdoor air while exhausting stale indoor air. The units make use of Aldes' AHRI Certified Aluminum cores that deliver superior heat transfer and can be used in any climate zone. The highly efficient and quiet EC motors use on average 50-75% less electricity than typical PSC motors, significantly increasing return on investment.

The H1800A-Fi-EC and H1800A-Ri-EC is recommended for smaller non-residential spaces or dedicated zones within larger buildings, such as classrooms, common areas of residential complexes and indoor parking garages.

Designed for versatile indoor installation, Aldes light commercial ventilators can fit almost anywhere and still provide easy access to the internal components with removable access doors on both sides. The units also offer a choice of five continuous operation speeds and a demand-controlled high-speed exchange mode.

CASING

Material: Painted galvanized steel
Insulation: 1" (25 mm)
Drain Connection: Ø 1/2" (Ø 13 mm)
Duct Connections: 24" x 8" (508 mm x 203 mm)
Width: 45-5/8" (1158 mm)
Height: 29-5/8" (753 mm)
Depth: 48-7/8" (1242 mm)
Unit Weight: 245 lbs (111 kg); 258 lbs (117 kg) with recirculation
Shipping Weight: 300 lbs (136 kg)
313 lbs (142 kg) with recirculation

PLATE EXCHANGER

Standard: Aluminum (sensible heat transfer)
Quantity: 3
Pitch: 0.13" (3 mm)
Dimensions: 16.34" x 16.34" x 15.67"
(415 mm x 415 mm x 398 mm)



MOUNTING

Supplied with base rails. Support rod by others.

BLOWERS

Quantity: 4
Type: Backward-inclined motorized impeller, direct-drive EC Motors, variable speed, external rotor

FILTERS

Number: 6
Type: Aluminum (P/N: 683951)
Optional: MERV 8 (P/N: 683952), Carbon (P/N: 683953), or High Efficiency/MERV13 Equivalent (P/N: 683954)

Additional Air Pressure Drop with Optional Filters				
Filter Type	Airflow CFM (m³/h)			
	600 (1020)	1000 (1700)	1400 (2380)	1800 (3060)
MERV 8	0.04	0.08	0.15	0.22
Carbon	0.04	0.08	0.15	0.22
High Efficiency	0.22	0.35	0.48	0.63

ELECTRICAL REQUIREMENTS

230V/ 1PH / 60 Hz, 9.1 A
208V/ 1PH / 60 Hz, 9.9 A
Supplied with 6' power cord with NEMA 6-15 plug

FROST CONTROL

Cycles controlled by a temperature sensor when outdoor temperatures fall below 23°F (-5°C).

- Standard: Exhaust Defrost (H1800A-Fi-EC)
- Optional: Recirculation Defrost (H1800A-Ri-EC)

CONTROLS

24 VAC, 10 VA output for supply and exhaust dampers
Low-voltage dry contact (24 VAC, 20 VA) for:

- Occupancy Control (start/stop)
- Fan Interlock (NO and NC)
- Speed Selection
- Exhaust/Recirculation (with H1800A-Ri-EC)

Compatible With:

- Digital Multifunction Control (P/N: 611242FC)
- Mode Control (exchange or recirculation) (P/N: 611230)
- Humidity Control (P/N: 611224)
- Speed Control (Low/Intermittent/High) (P/N: 611229)
- 20/40/60 Minute Timer (P/N: 611228)


APPROVALS

Meets Standards:
• UL 1812 and C22.2 no113


Listed:




Dimensions

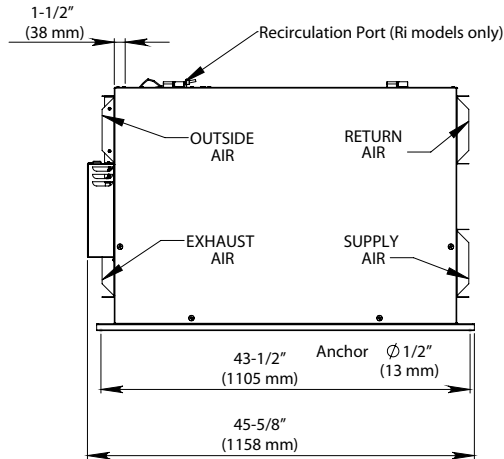

FRONT VIEW

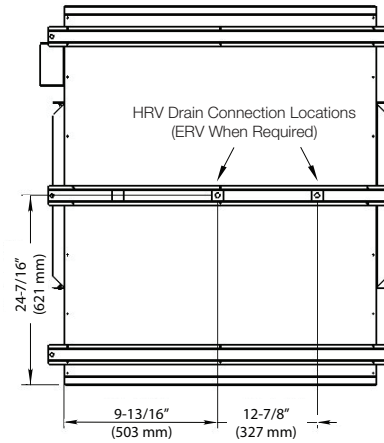


BOTTOM VIEW

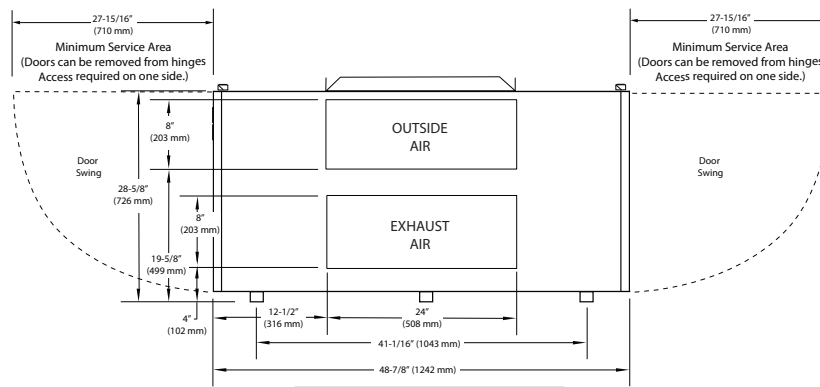


SIDE VIEW

Performance

H1800A-Fi-EC & H1800A-Ri-EC Ventilation Performance

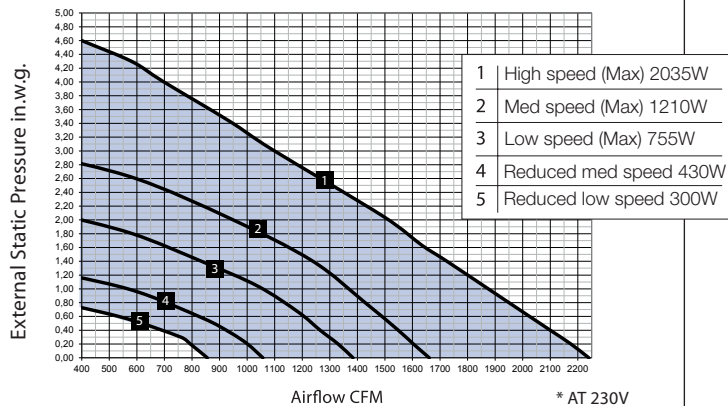

H1800A-Fi-EC & H1800A-Ri-EC Core Efficiency

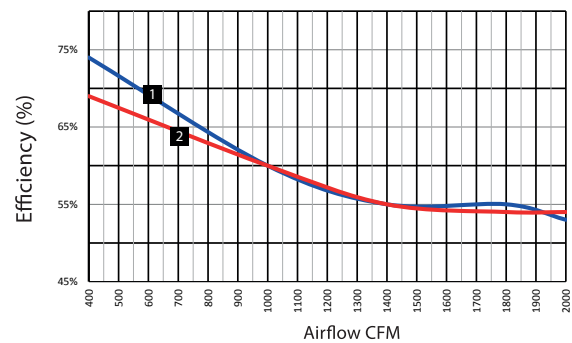

© 2018 American ALDES Ventilation Corporation. Reproduction or distribution, in whole or in part, of this document, in any form or by any means, without the express written consent of American ALDES Ventilation Corporation, is strictly prohibited. The information contained within this document is subject to change without prior written notice.

American ALDES Ventilation Corporation • 4521 19th Street Court East, Suite 104 • Bradenton, FL 34203 – USA
941.351.3441 • 800.255.7749 • 941.351.3442 (fax) • info@americanaldes.com • www.aldes.us