




LIGHT COMMERCIAL  
**H650-Fi-P**  
Heat Recovery Ventilator  
200-850 CFM Range

PRODUCT  
SPECIFICATIONS  
& TECHNICAL  
DATA

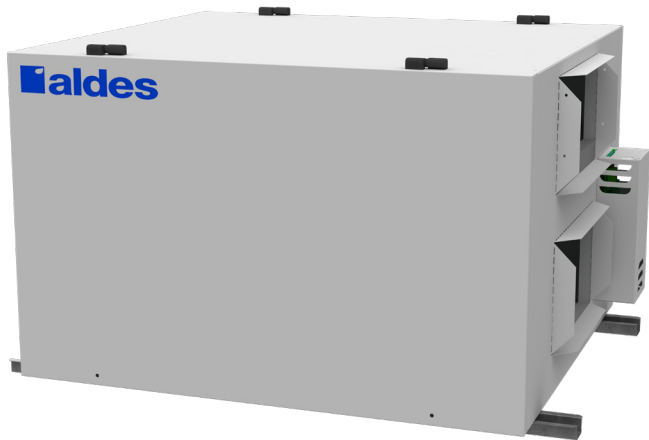

#### H650-Fi-P

The H650-Fi-P heat recovery ventilator provides high-efficiency heat recovery for indoor pool applications. The unit uses a robust, water-washable polypropylene core that can withstand the air-quality challenges of a pool environment. Producing approximately **800 CFM** at 0.20 in.w.g (ESP), the H650-Fi-P powerfully removes excess humidity and keeps pool users comfortable. The stainless steel interior resists corrosion.

Defrost modes are automatically included with the H650-Fi-P, making it ideal for cold-weather applications. The unit shuts down the fan for the outdoor air supply during defrost cycles.

#### FEATURES

- Plate-type polypropylene cores
- Quiet operation
- Stainless steel interior and totally enclosed motors
- Efficient and economical operation
- Indoor pool application

#### CASING

Material: Painted galvanized steel 22GA exterior  
Stainless steel interior

Insulation: 1" R4 rated

Drain Connection: Ø 1/2" (Ø 13 mm)

Duct Connections: 14" x 8" (356 mm x 203 mm)

Width: 36-1/4" (921 mm)

Height: 23-7/8" (606 mm)

Depth: 32-1/8" (816 mm)

Unit Weight: 131 lbs (59 kg)

Shipping Weight: 185 lbs (84 kg)

#### PLATE EXCHANGER

Standard: Polypropylene (sensible heat transfer)

Quantity: 2

Pitch: 0.16" (4 mm)

Dimensions: 12" x 12" x 15" (305 mm x 305 mm x 381 mm)



#### MOUNTING

Supplied with base rails. Support rod by others.

#### BLOWERS

Quantity: 2

Type: Backward-inclined motorized impeller, direct-drive PSC, variable speed, external rotor

#### FILTERS

Number: 4

Type: Aluminum (P/N: 683901)

#### ELECTRICAL REQUIREMENTS

120 VAC, 60 Hz, 5.5 Amps

#### FROST CONTROL

- Cycles controlled by a temperature sensor when outdoor temperatures fall below 23°F (-5°C).
- By Exhaust Defrost

#### CONTROLS

24 VAC, 10 VA output for supply and exhaust dampers

Low-voltage dry contact (24 VAC, 20 VA) for:

- Occupancy Control (start/stop)
- Fan Interlock (NO and NC)
- Speed Selection

Compatible With:

- Digital Multifunction Control (P/N: 611242FC)
- Mode Control (exhaust defrost) (P/N: 611230)
- Humidity Control (P/N: 611224)
- Speed Control (Low/Intermittent/High) (P/N: 611229)
- 20/40/60 Minute Timer (P/N: 611228)

#### APPROVALS


Meets Standards:

- UL 1812 and C22.2 no113


Listed:



# Dimensions

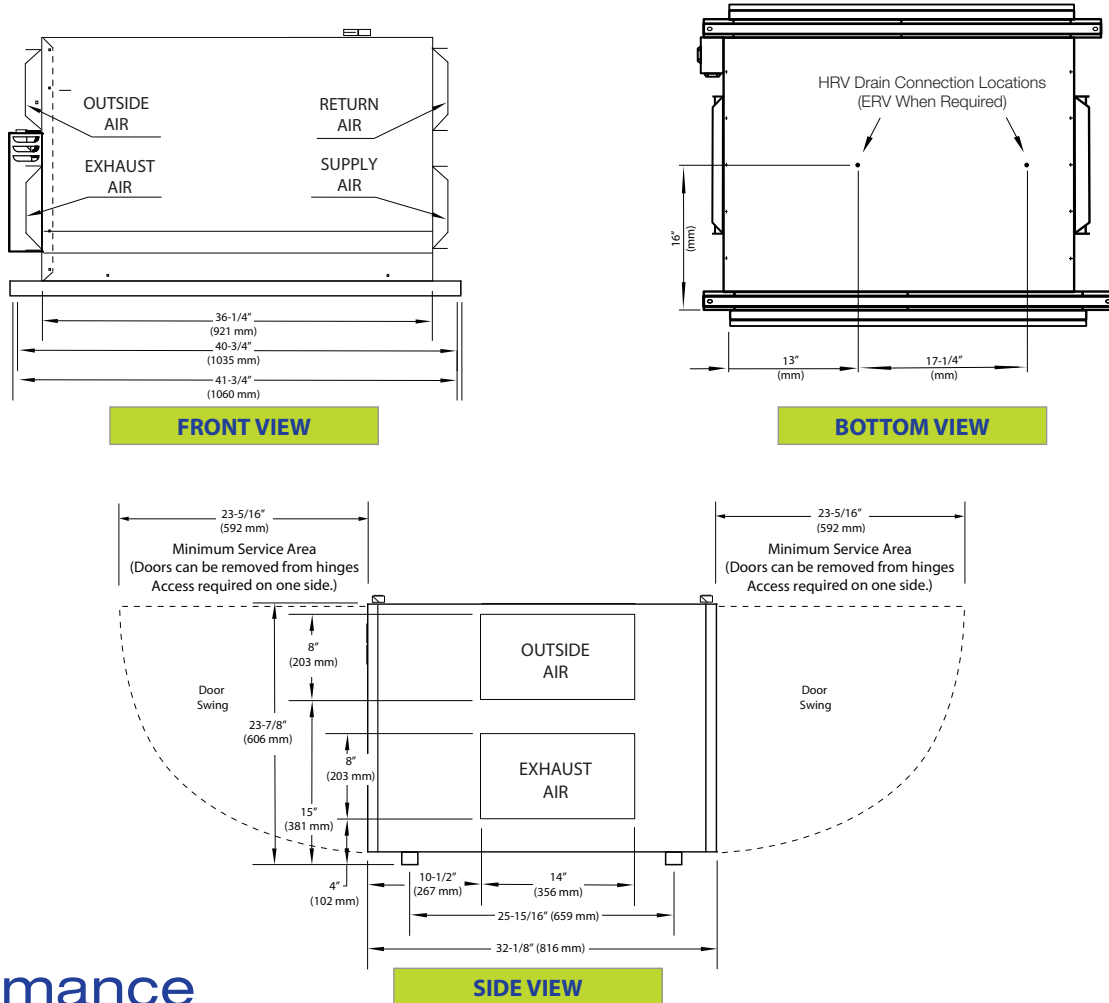

# Performance

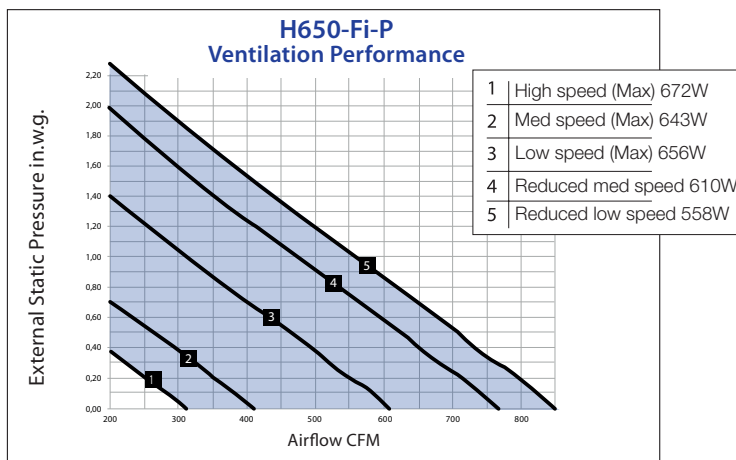

	Sensible Recovery %
100 % Air Flow Cooling	46%
75 % Air Flow Cooling	48%
100 % Air Flow Heating	45%
75 % Air Flow Heating	48%
AHRI Core Reference Number	8284038

© 2018 American ALDES Ventilation Corporation. Reproduction or distribution, in whole or in part, of this document, in any form or by any means, without the express written consent of American ALDES Ventilation Corporation, is strictly prohibited. The information contained within this document is subject to change without prior written notice.