



InspirAIR® COMPACT MULTI-FAMILY
H130-HRG-N
Heat Recovery Ventilator

PRODUCT
SPECIFICATIONS
& TECHNICAL
DATA



PRODUCT DESCRIPTION

The ideal in-suite ventilation solution for multi-dwelling applications, the H130-HRG-N delivers ENERGY STAR® Qualified (Canada) performance in a compact, easy-to-install package only 9-1/4" in height. Easily concealed in a drop-ceiling or soffit, the H130-HRG-N has been thoughtfully engineered for apartments, condos, and all dwellings that use concrete-slab construction. The H130-HRG-N produces approximately **120 CFM** at 0.20 in.w.g (ESP), enough for even the largest units in multi-family construction.

The H130-HRG-N includes Aldes' exclusive EvacMAX™ on-demand boost for maximum ventilation, and FLEXControl, electronic calibration that eliminates the need for balancing dampers and improves overall efficiency.

KEY FEATURES

- Electronically and independently adjustable supply and exhaust blowers (FLEXControl)
- Backward-inclined impellers on totally enclosed motors
- Horizontal configuration for flexible installation
- Easy access to core and filters for cleaning
- Extremely durable core
- Multiple low-voltage controller options

APPROVALS

Meets Standards:

- C22.2 no113 and UL 1812
- ENERGY STAR® Qualified (Canada)



CASING

Material: Pre-painted 24-gauge galvanized steel
Drain Connection: Ø 3/8" (Ø 10 mm)
Duct Diameter: Ø 5" (Ø 127 mm)
Insulation: 1" (25 mm) Fiberglass with FSK and polystyrene
Width: 24-1/8" (613 mm)
Height: 9-1/4" (235 mm)
Depth: 22-3/4" (578 mm)
Weight: 35 lbs (16 kg); Shipping Weight: 41 lbs (19 kg)
Supply Damper: Motorized; Exhaust Damper: Gravity

MOUNTING

- Suspended from the ceiling by chains with vibration-isolating springs
- In the ceiling with an access panel

RECOVERY CORE

Material: Polypropylene

BLOWERS

Quantity: 2
Type: Motorized impellers (backward-inclined)

ELECTRICAL REQUIREMENTS

120 VAC, 60 Hz, 1.3 A, 180 W
Hard-wired

CONTROLS

Low voltage (24 VAC) for:

- Digital Multifunction Control (P/N: 611242)
- Mode Control (Recirculation) (P/N: 611230)
- Humidity Control (P/N: 611224)
- Speed Control (Low/Intermittent/High) (P/N: 611229)
- 20/40/60 Minute Timer (P/N: 611228)

FROST CONTROL

- Automatic timed recirculation
- Cycles controlled by a temperature sensor when the outdoor temperature drops below 23°F (-5°C)


FILTERS

Quantity: 2
Type: Washable Foam 20 ppi (P/N: 612405)
Optional: Aluminum (P/N: 612404), Carbon (P/N: 612406), or High Efficiency/MERV13 Equivalent (P/N: 612407)


WARRANTY

Core Assembly: Limited lifetime warranty
All Other Covered Components: Limited 5-year warranty

Dimensions

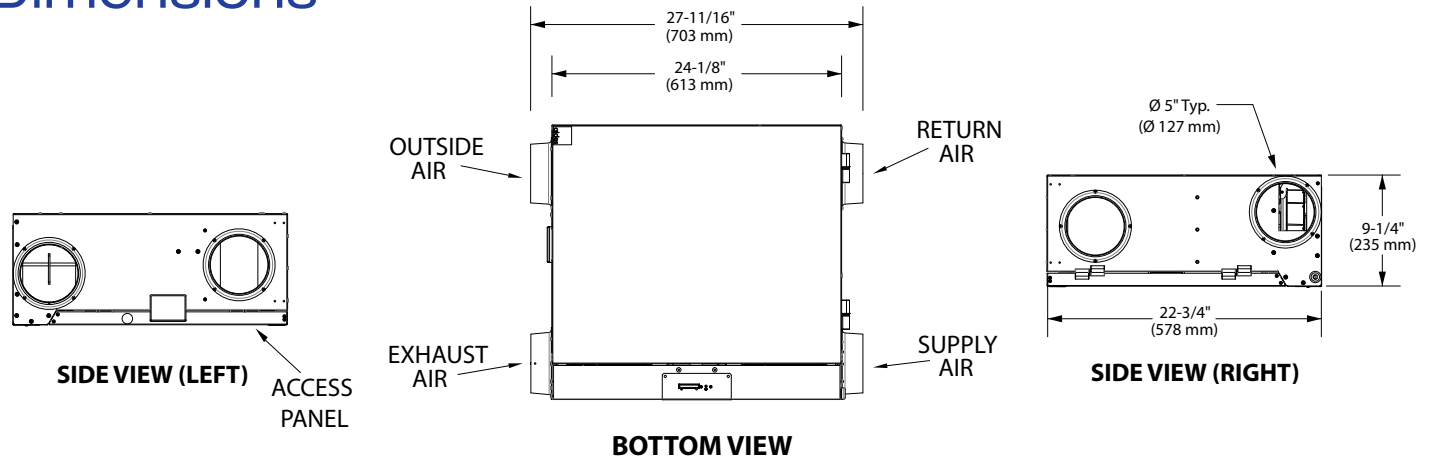

Performance

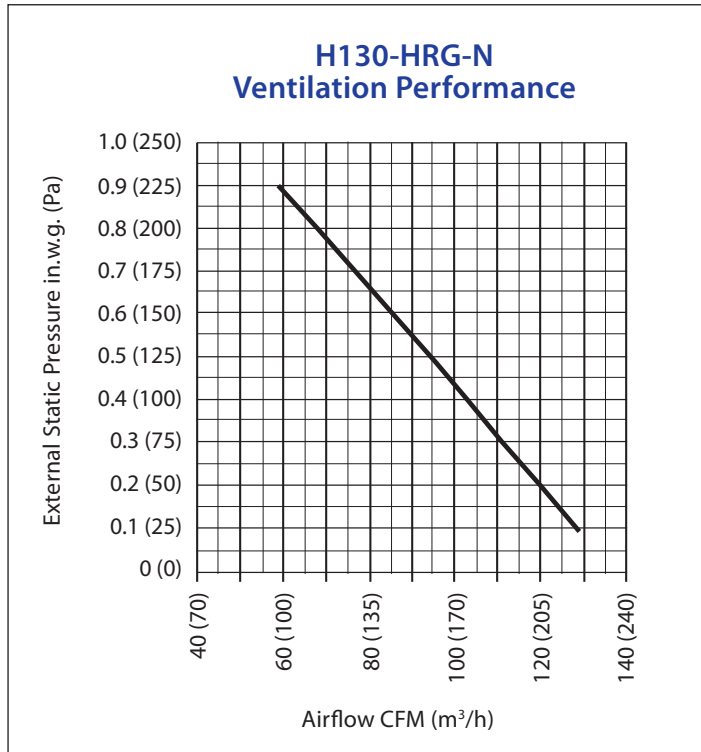

Recovery Performance

Supply Temperature		Net Airflow		Power Consumed (W)	Sensible Recovery Efficiency	Apparent Sensible Effectiveness
°F	°C	CFM	L/s			
32	0	55	26	46	69%	78%
32	0	66	31	52	66%	75%
32	0	101	48	92	61%	69%
-13	-25	68	32	76	60%	76%

Project:		Architect:	
Location:		Engineer:	
Model #:		Contractor:	
Quantity:		Comments:	
Submitted By:			
Date:			

© 2019 American ALDES Ventilation Corporation. Reproduction or distribution, in whole or in part, of this document, in any form or by any means, without the express written consent of American ALDES Ventilation Corporation, is strictly prohibited. The information contained within this document is subject to change without prior written notice.