



PRODUCT DESCRIPTION

Compact size, large performance. The H190-TRG heat recovery ventilator exchanges up to 200 CFM of fresh air at 0.4 in.w.g. (ESP) and recovers heat through its high-efficiency polypropylene core. The H190-TRG has been thoughtfully engineered for simple installation in almost any size of house.

Recommendation :
Ideal for homes from 1500ft² to 2500ft²

KEY FEATURES

Electronically and independently adjustable supply and exhaust blowers (FLEXControl)

Gauge ports on the door for fast and reliable airflow readings

Exclusive EvacMax™ feature that provides on-demand boost for maximum ventilation

Non-dust-loading backward-inclined impellers on totally enclosed motors

Twist-in collars for easy flex-duct attachment

Easy access to core and filters for cleaning

Extremely durable polypropylene core

Recirculating defrost collar snaps into pre-punched area of cabinet for ducting flexibility

RESIDENTIAL

HRV

H190-TRG

HEAT RECOVERY VENTILATOR
200 CFM at 0.40 in.w.g (ESP)



CORE

UNIT



Recovery Core

Material: Polypropylene

Casing

Material: Pre-painted 24-gauge galvanized steel

Drain Connection: Ø 3/8" (Ø 10 mm)

Duct Connections: Ø 6" (Ø 152 mm)

Insulation: Molded EPS

Width: 29-3/16" (741 mm)

Height: 21" (533 mm)

Depth: 15-1/8" (384 mm)

Weight: 46 lbs (21 kg); Shipping Weight: 51 lbs (23 kg)

Supply Damper: Motorized; Exhaust Damper: Gravity



Mounting

Suspended by chains with vibration-isolating springs



Electrical requirement

120 VAC, 60 Hz, 1.95 A, 155 W

Cord Set: 48" (1219 mm) with ground



Frost control

Automatic timed recirculation, fifth port. Cycles controlled by a temperature sensor when outdoor temperature drops below 23°F (-5°C)



Filters

Type : Aluminum (P/N 683959)


Option : Carbon (P/N 683956), MERV 6 (P/N 683958) or high-efficiency MERV 13 (P/N 683957)



Blowers


Motorized impellers (backward-inclined)

Dimensions

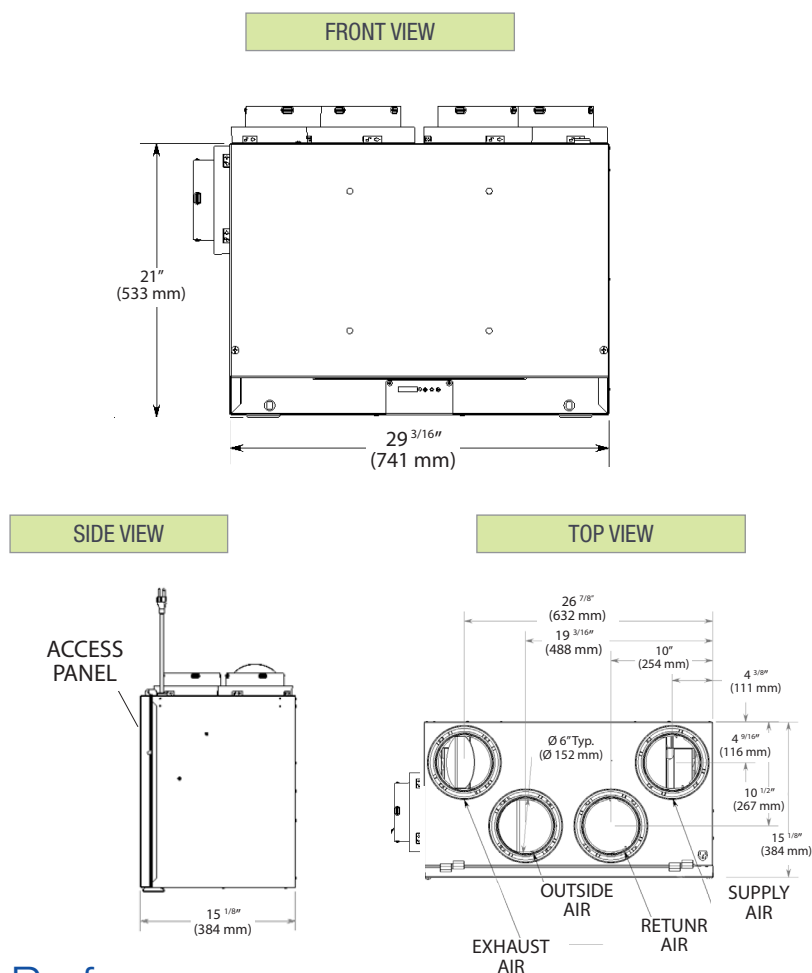


Controls

Low voltage dry contact (24VAC) for interlock with heating/cooling systems.



Digital Multifunction Control
(# 611242) and (#611242-FC)



LCD Electronic Multifunction
Control (P/N 611227)



20/40/60 Minute Timer (P/N
611228)



Speed Control (Low/Intermittent/High)
(P/N 611229)




Mode Control (Recirculation)
(P/N 611230)

Performance

Supply Temperature		Net Airflow		Power Consumed (W)	Sensible Recovery Efficiency	Adjusted Sensible Recovery Efficiency
°F	°C	CFM	L/s			
32	0	64	30	68	75%	82%
32	0	81	38	70	74%	80%
32	0	120	57	110	68%	75%
-13	-25	74	35	84	66%	70%

H190-TRG Ventilation Performance

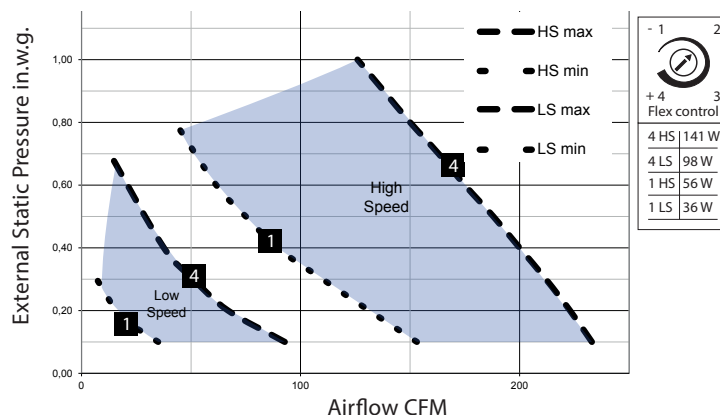

Project:		Architect:	
Location:		Engineer:	
Model #:		Contractor:	
Quantity:		Comments:	
Submitted By:			
Date:			

2018 ALDES Canada. Reproduction or distribution, in whole or in part, of this document, in any form or by any means, without the express written consent of ALDES Canada, is strictly prohibited. The information contained within this document is subject to change without prior written notice.

ALDES Canada • 100 Carter Street • Saint-Léonard d'Aston (Québec) Canada J0C 1M0
819.399.3400 • 1.800.262.0916 • 819.399.4001 (Fax.) • information@aldes.com • www.aldes.ca