



GALVANIZED STEEL



ALUMINUM

HIGH-PERFORMANCE ROOF CAPS

WITH BACKDRAFT DAMPERS AND REMOVABLE SCREENS

ROOF CAPS, WALL HOODS, GRILLES
& DUCT FITTINGS

Dimensions

Product Description

Aldes High-Performance Roof Caps are engineered to minimize noise and pressure resistance for maximum airflow, while effectively removing moisture and condensation from the duct system. All roof caps are designed for durability and aesthetic value.




Construction

Aldes low-profile, low-pressure-drop roof caps include integral backdraft/weather dampers, removable bird screens, leak-proof roof flashing, and extended duct collars for simple installation. Available in heavy-gauge G90 galvanized steel or "0" temper all-aluminum type "1100".

Installing the Roof Caps

All roof caps are designed for installation on any roof pitch or shingling.

Cutaway shows
backdraft
damper

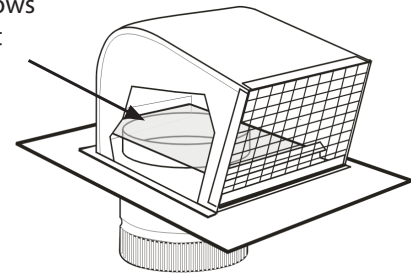

Model	PART NUMBER		A	B	C	D	E	F
	Galvanized*	Aluminum						
4"	22 043	22 043 AL	4"	5.5"	11.75"	11.75"	6"	7.50"
5"	22 044	22 044 AL	5"	5.5"	11.75"	11.75"	6"	7.50"
6"	22 046	22 046 AL	6"	7.0"	13.75"	13.75"	8"	10.00"
8"	22 048	22 048 AL	8"	8.0"	15.75"	15.75"	10"	11.75"
10"	22 051	22 051 AL	10"	10.0"	19.75"	19.75"	14"	14.50"
12"	22 052	22 052 AL	12"	12.0"	21.75"	21.75"	16"	17.50"

*Galvanized Steel Items: 4" to 8" are 26-gauge; 10" and 12" are 24-gauge
Materials: Galvanized Steel G-90 and Aluminum Type 1100. Damper: Aluminum sheet, 0.020"

For more information, contact your Aldes sales advisor, visit aldes-na.com, call 1.800.255.7749, or find us on

