



Product Description

- Normally closed and normally open models available (24 VAC or 120 VAC).
- All models include an end switch rated for a 10 Amp load.
- The end switch permits sequencing the operation of a remote fan after damper is opened, enabling the use of remote fans to selectively ventilate laundry rooms, kitchens, or individual bathrooms.
- Possible controls for use with zoned ventilation systems include: Manual spring-wound time delay, electronic time delay, cycle timer, programmable timers, occupancy-and-humidity-sensing switches.
- Motorized dampers can also be used to control the sequencing of outside fresh or make-up air in forced-air systems.
- Damper Motor carries C-UL-US Component Recognition Mark.

Warranty


Product guaranteed to be free of defective material or workmanship for a period of one (1) year from the date of delivery.

MOTORIZED DAMPERS

WITH AND WITHOUT END SWITCH

AIRFLOW & ZONE CONTROL

Dimensions

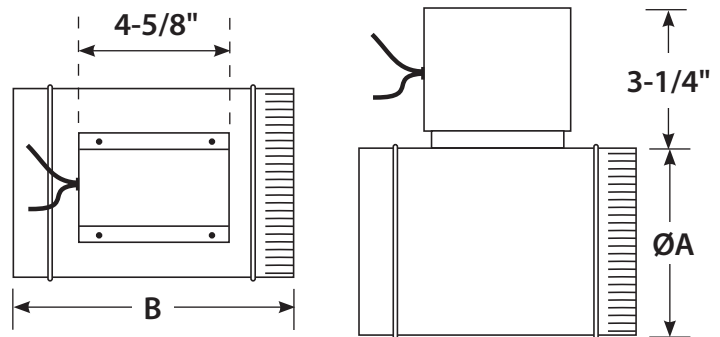

| MOTORIZED DAMPER SIZE | | | | | | | |
|-----------------------|----|----|----|----|-----|-----|-----|
| | 4" | 5" | 6" | 8" | 10" | 12" | 14" |
| ØA | 4" | 5" | 6" | 8" | 10" | 12" | 14" |
| B | 6" | 6" | 6" | 8" | 10" | 12" | 14" |

| MOTORIZED DAMPERS | | |
|-------------------|---------------|--------------|
| Part Number | | Description |
| Normally Closed | Normally Open | |
| 23 037NC | 23 037NO | 4" - 24Vac |
| 23 038NC | 23 038NO | 4" - 120Vac |
| 23 039NC | 23 039NO | 5" - 24Vac |
| 23 043NC | 23 043NO | 5" - 120Vac |
| 23 040NC | 23 040NO | 6" - 24Vac |
| 23 041NC | 23 041NO | 6" - 120Vac |
| 23 044NC | 23 044NO | 8" - 24Vac |
| 23 045NC | 23 045NO | 8" - 120Vac |
| 23 046NC | 23 046NO | 10" - 24Vac |
| 23 047NC | 23 047NO | 10" - 120Vac |
| 23 048NC | 23 048NO | 12" - 24Vac |
| 23 049NC | 23 049NO | 12" - 120Vac |
| 23 050NC | 23 050NO | 14" - 24Vac |
| 23 051NC | 23 051NO | 14" - 120Vac |

| MOTORIZED DAMPERS WITH END SWITCH | | |
|-----------------------------------|---------------|--------------|
| Part Number | | Description |
| Normally Closed | Normally Open | |
| 23 037NCES | 23 037NOES | 4" - 24Vac |
| 23 038NCES | 23 038NOES | 4" - 120Vac |
| 23 039NCES | 23 039NOES | 5" - 24Vac |
| 23 043NCES | 23 043NOES | 5" - 120Vac |
| 23 040NCES | 23 040NOES | 6" - 24Vac |
| 23 041NCES | 23 041NOES | 6" - 120Vac |
| 23 044NCES | 23 044NOES | 8" - 24Vac |
| 23 045NCES | 23 045NOES | 8" - 120Vac |
| 23 046NCES | 23 046NOES | 10" - 24Vac |
| 23 047NCES | 23 047NOES | 10" - 120Vac |
| 23 048NCES | 23 048NOES | 12" - 24Vac |
| 23 049NCES | 23 049NOES | 12" - 120Vac |
| 23 050NCES | 23 050NOES | 14" - 24Vac |
| 23 051NCES | 23 051NOES | 14" - 120Vac |

For more information, contact your Aldes sales advisor, visit aldes-na.com, call 1.800.255.7749, or find us on

