



InspirAIR® PRONTO

PRONTO 20

Energy Recovery Ventilator

PRODUCT
SPECIFICATIONS
SHEET



NOMINAL CAPACITY

500-2200 CFM

PLATE EXCHANGER

High Latent Transfer (sensible and latent heat transfer)

CASING

(Standard)

- Double-wall cabinet
- 22-gauge galvanized steel interior
- Access doors with quarter-turn handles
- 22-gauge galvanized steel drain pan
- Drain Connections: 1" (25 mm) NPT
- Insulation: 1" (25 mm)
- Painted white baked enamel outside finish
- Supply and exhaust hoods with bird screens
- Aluminium insulated motorized damper with endswitch contacts on outside air and exhaust air opening

MOUNTING (Standard)

- Standard Platform
- Isolated 18-gauge galvanized steel roof curb, 14 inches in height (to order separately)

Product code: RC-Pronto20-I

ELECTRICAL & CONTROLS (Standard)

- Non-fused disconnect (NEMA 4)
- 24 V transformer for controls
- Single point power

(Optional: Sold Separately)

- Bacnet MSTP controller kit Product code: 699626
- Bacnet IP Controller kit Product code: 699627

WARRANTY

Limited to 2 years on the cores and all covered components.

FILTERS

(Standard)

Quantity: 2 supply, 2 exhaust

Type: MERV 8

Dimensions: 16" x 20" x 2" (407 mm x 508 mm x 305 mm)

Dirty filter alarm

(Optional: Sold Separately)

MERV 13 Filters (substitute on supply air circuit only)

Product code: 607071

BLOWERS & MOTORS

- Quantity: 2 (1 per air stream)
- Plenum Type: Backward Inclined
- Permanently sealed and lubricated ball bearings
- Direct Drive EC Motor
- Available Voltages:
208, 230 / 3ph / 60Hz


FROST PREVENTION/CONTROL

- Fan defrost cycles activated by a temperature reference: 14°F (-10°C).


T2 < outside temperature < T1	Defrost time (mins)	7
	Exchange time (mins)	39
T3 < outside temperature < T2	Defrost time (mins)	7
	Exchange time (mins)	29.5
Outside temperature < T3	Defrost time (mins)	7
	Exchange time (mins)	20

T1 (°C)	-10
T2 (°C)	-18
T3 (°C)	-25

PRONTO 20: Ventilation Performance

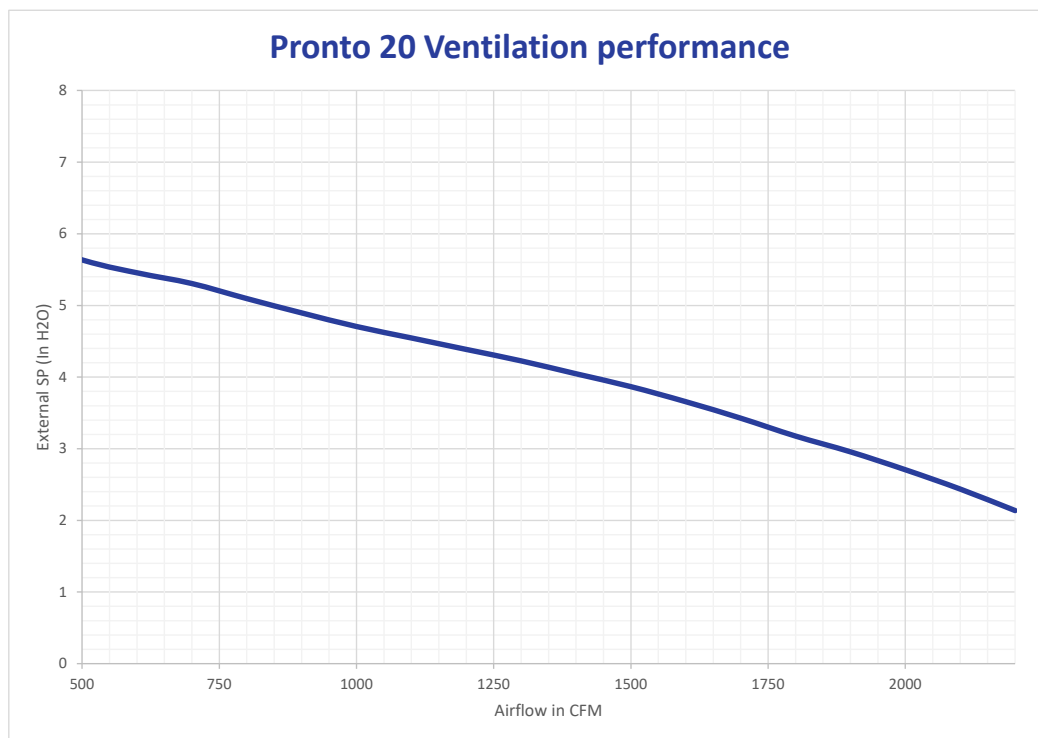

High Latent Transfer Core Performance

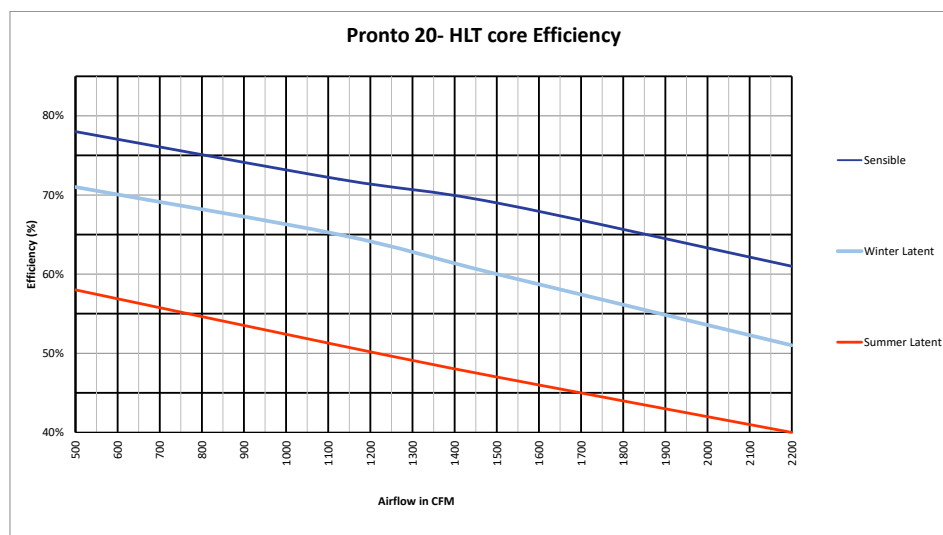


AHRI STANDARD CONDITIONS	CONDITIONS	
Outside Air Temperature	Winter	Summer
Dry Bulb	35°F (1.7°C)	95°F (35°C)
Wet Bulb	33°F (0.6°C)	78°F (25.6°C)
Exhaust Air Temperature	Winter	Summer
Dry Bulb	70°F (21.1°C)	75°F (23.9°C)
Wet Bulb	58°F (14.4°C)	63°F (17.2°C)

Note: Efficiencies are based on AHRI standard conditions.


PRONTO 20: Dimensions (Standard - inches)

PRONTO 20

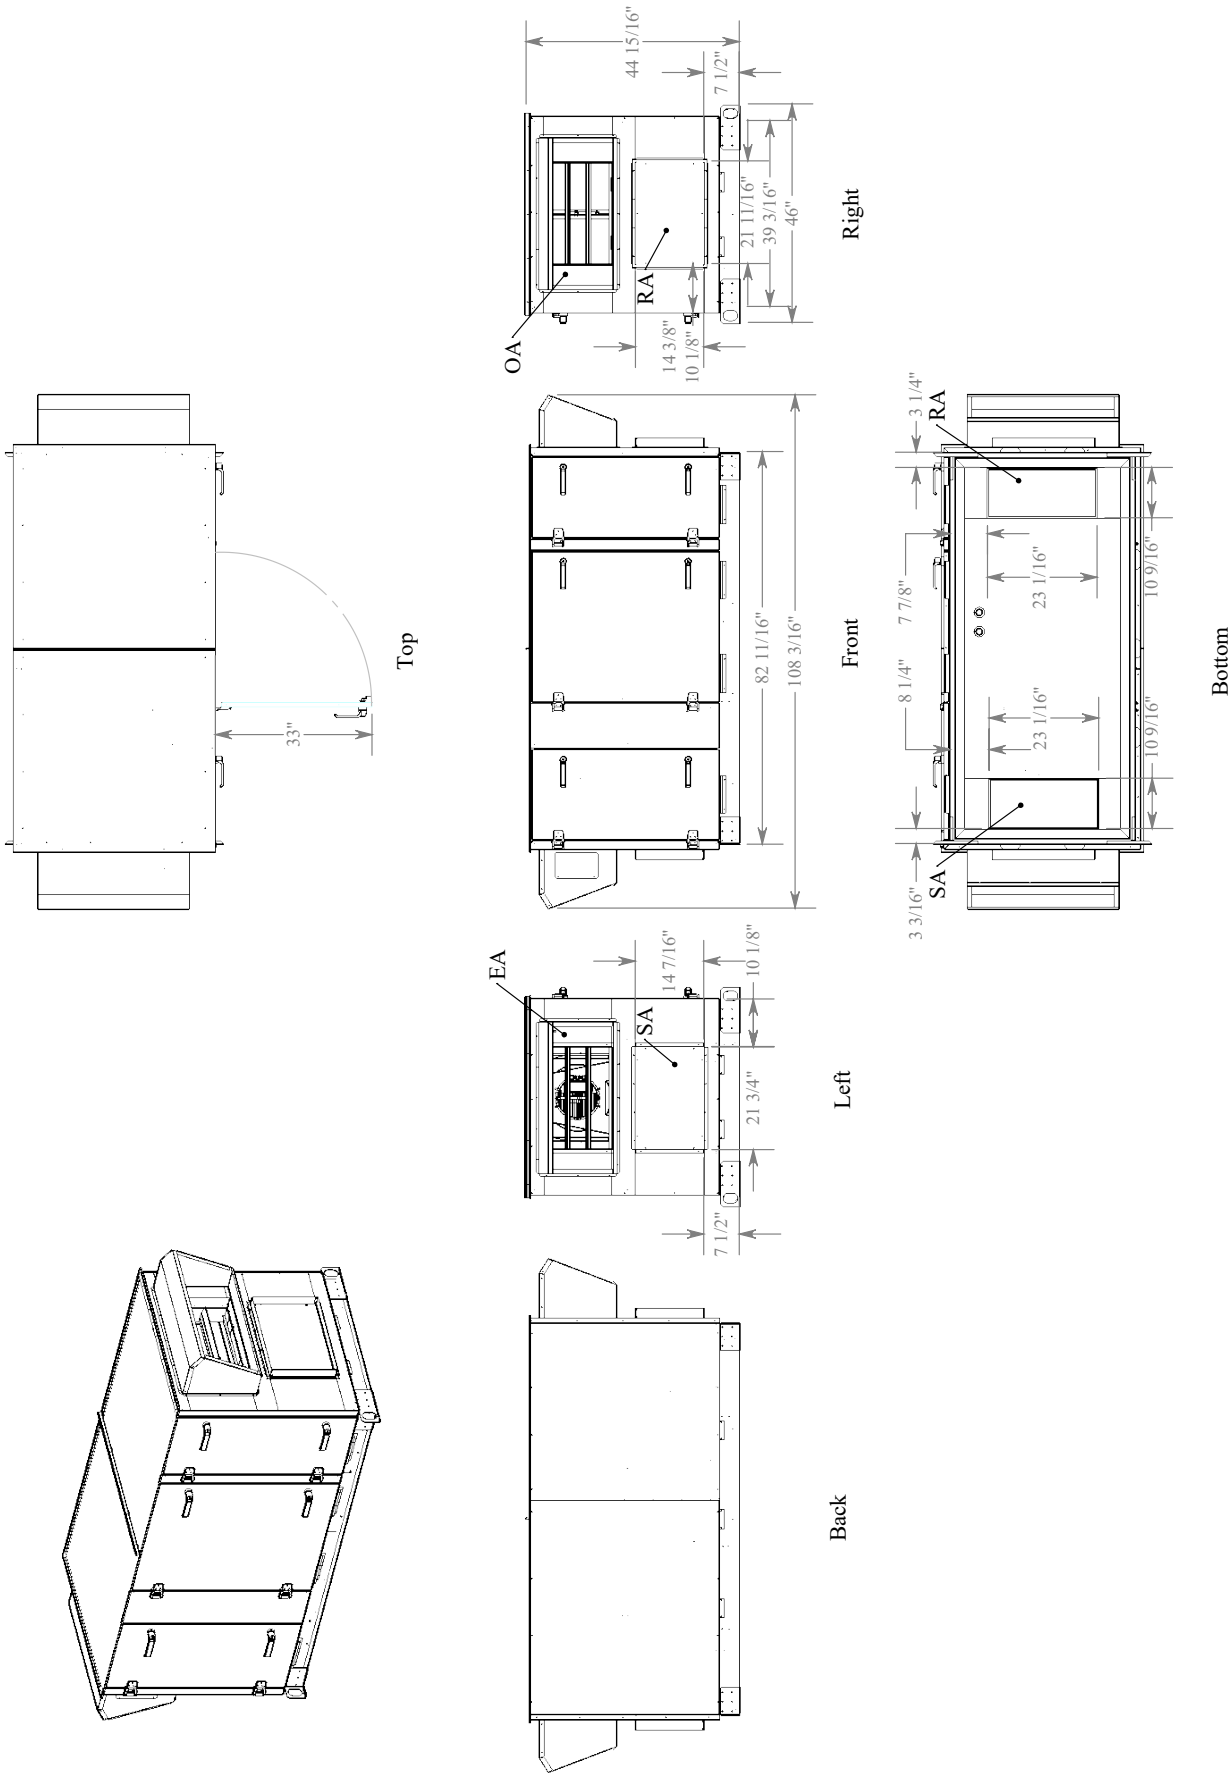


PRONTO 20: Roof Curb Dimensions - inches

PRONTO 20

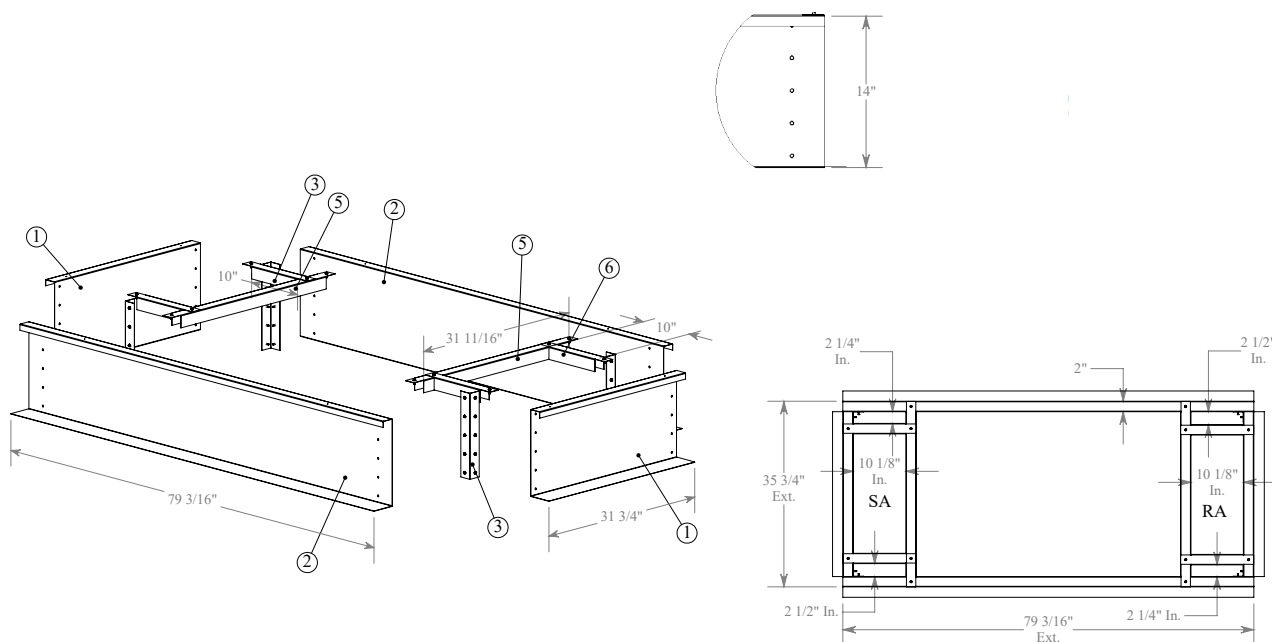

PRONTO 20: Configurations & Weights

AVAILABLE CONFIGURATIONS
1-2-5-6
1-3-4-6

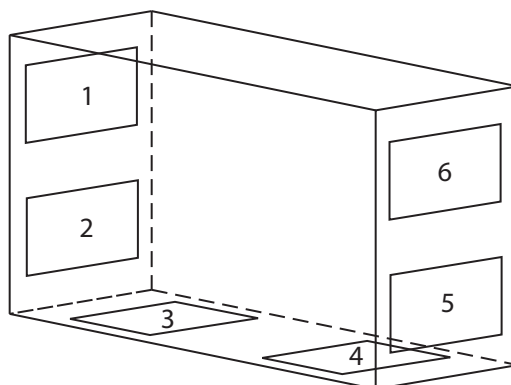

DUCT CONNECTION KEY	
1	Exhaust Air (EA)
2, 3	Supply Air (SA)
4, 5	Return Air (RA)
6	Outside Air (OA)

PRONTO 20 WEIGHTS	
Unit Weight	1200 lbs
Unit Shipping Weight	1300 lbs

For more information, contact your Aldes sales advisor, visit aldes-na.com, call 1.800.255.7749, or find us on



280223 ©2023 American ALDES Ventilation Corporation and ALDES Canada. All Rights Reserved. Reproduction or distribution, in whole or in part, of this document, in any form or by any means, without the express written consent of American ALDES

Ventilation Corporation and/or ALDES Canada, is strictly prohibited. The information contained within this document is subject to change without prior written notice.

