



InspirAIR® PRONTO

PRONTO 30

Energy Recovery Ventilator

PRODUCT
SPECIFICATIONS
SHEET



NOMINAL CAPACITY

800-3200 CFM

PLATE EXCHANGER

High Latent Transfer (sensible and latent heat transfer)

CASING

(Standard)

- Double-wall cabinet
- 22-gauge galvanized steel interior
- Access doors with quarter-turn handles
- 22-gauge galvanized steel drain pan
- Drain Connections: 1" (25 mm) NPT
- Insulation: 1" (25 mm)
- Painted white baked enamel outside finish
- Supply and exhaust hoods with bird screens
- Aluminium insulated motorized damper with endswitch contacts on outside air and exhaust air opening

MOUNTING (Standard)

- Standard Platform
- Isolated 18-gauge galvanized steel roof curb
Height: 14 inches (to order separately)

Product code: RC-Pronto30-I

ELECTRICAL & CONTROLS (Standard)

- Non-fused disconnect (NEMA 4)
- 24 V transformer for controls
- Single point power

(Optional: Sold Separately)

- Bacnet MSTP controller kit Product code: 699626
- Bacnet IP Controller kit Product code: 699627

FILTERS

(Standard)

Quantity: 3 supply, 3 exhaust

Type: MERV 8

Dimensions: 16" x 20" x 3" (407 mm x 508 mm x 305 mm)

Dirty filter alarm

(Optional: Sold Separately)

MERV 13 Filters (substitute on supply air circuit only)

Product code: 607071

BLOWERS & MOTORS

- Quantity: 2 (1 per air stream)
- Plenum Type: Backward Inclined
- Permanently sealed and lubricated ball bearings
- Direct Drive EC Motor
- Available Voltages:
208, 230 / 3ph / 60Hz

FROST PREVENTION/CONTROL


- Fan defrost cycles activated by a temperature reference:
14°F (-10°C).

T2 < outside temperature < T1	Defrost time (mins)	7
	Exchange time (mins)	39
T3 < outside temperature < T2	Defrost time (mins)	7
	Exchange time (mins)	29.5
Outside temperature < T3	Defrost time (mins)	7
	Exchange time (mins)	20
T1 (°C)	-10	
T2 (°C)	-18	
T3 (°C)	-25	


WARRANTY

Limited to 2 years on the cores and all covered components.

PRONTO 30: Ventilation Performance

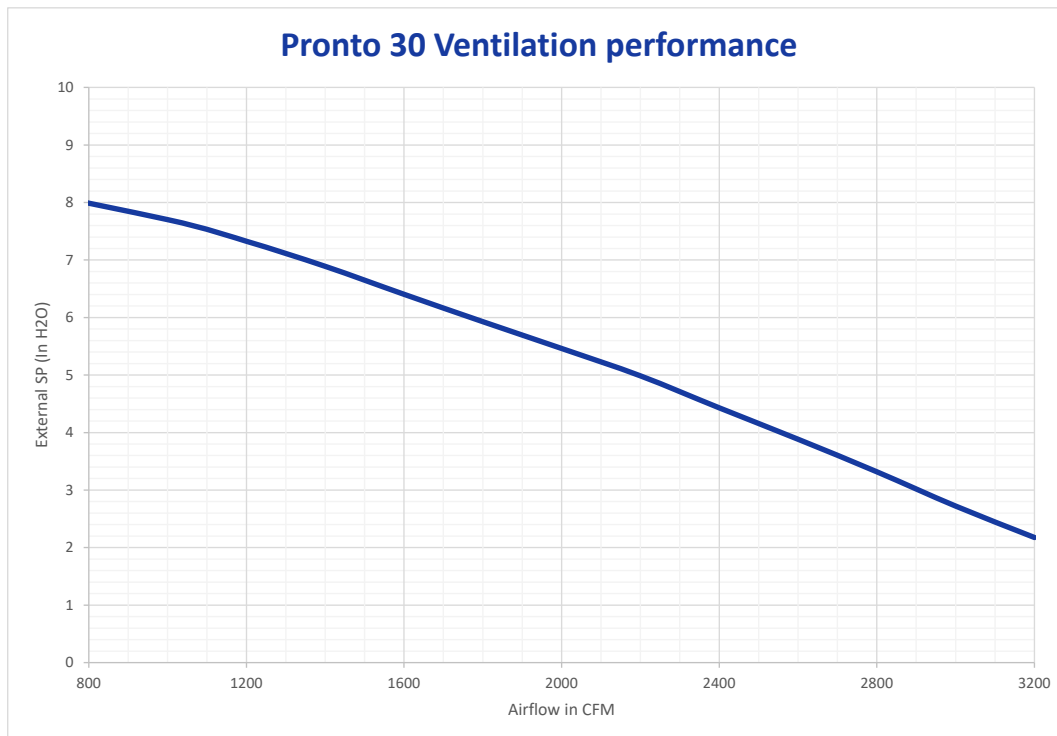

High Latent Transfer Core Performance

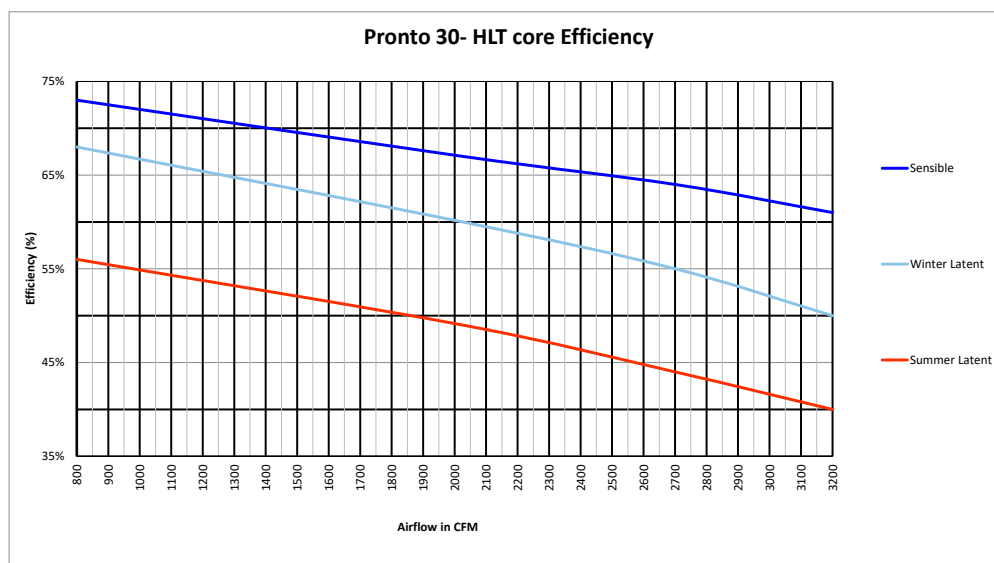


AHRI STANDARD CONDITIONS	CONDITIONS	
Outside Air Temperature	Winter	Summer
Dry Bulb	35°F (1.7°C)	95°F (35°C)
Wet Bulb	33°F (0.6°C)	78°F (25.6°C)
Exhaust Air Temperature	Winter	Summer
Dry Bulb	70°F (21.1°C)	75°F (23.9°C)
Wet Bulb	58°F (14.4°C)	63°F (17.2°C)

Note: Efficiencies are based on AHRI standard conditions.


PRONTO 30: Dimensions (Standard - inches)

PRONTO 30

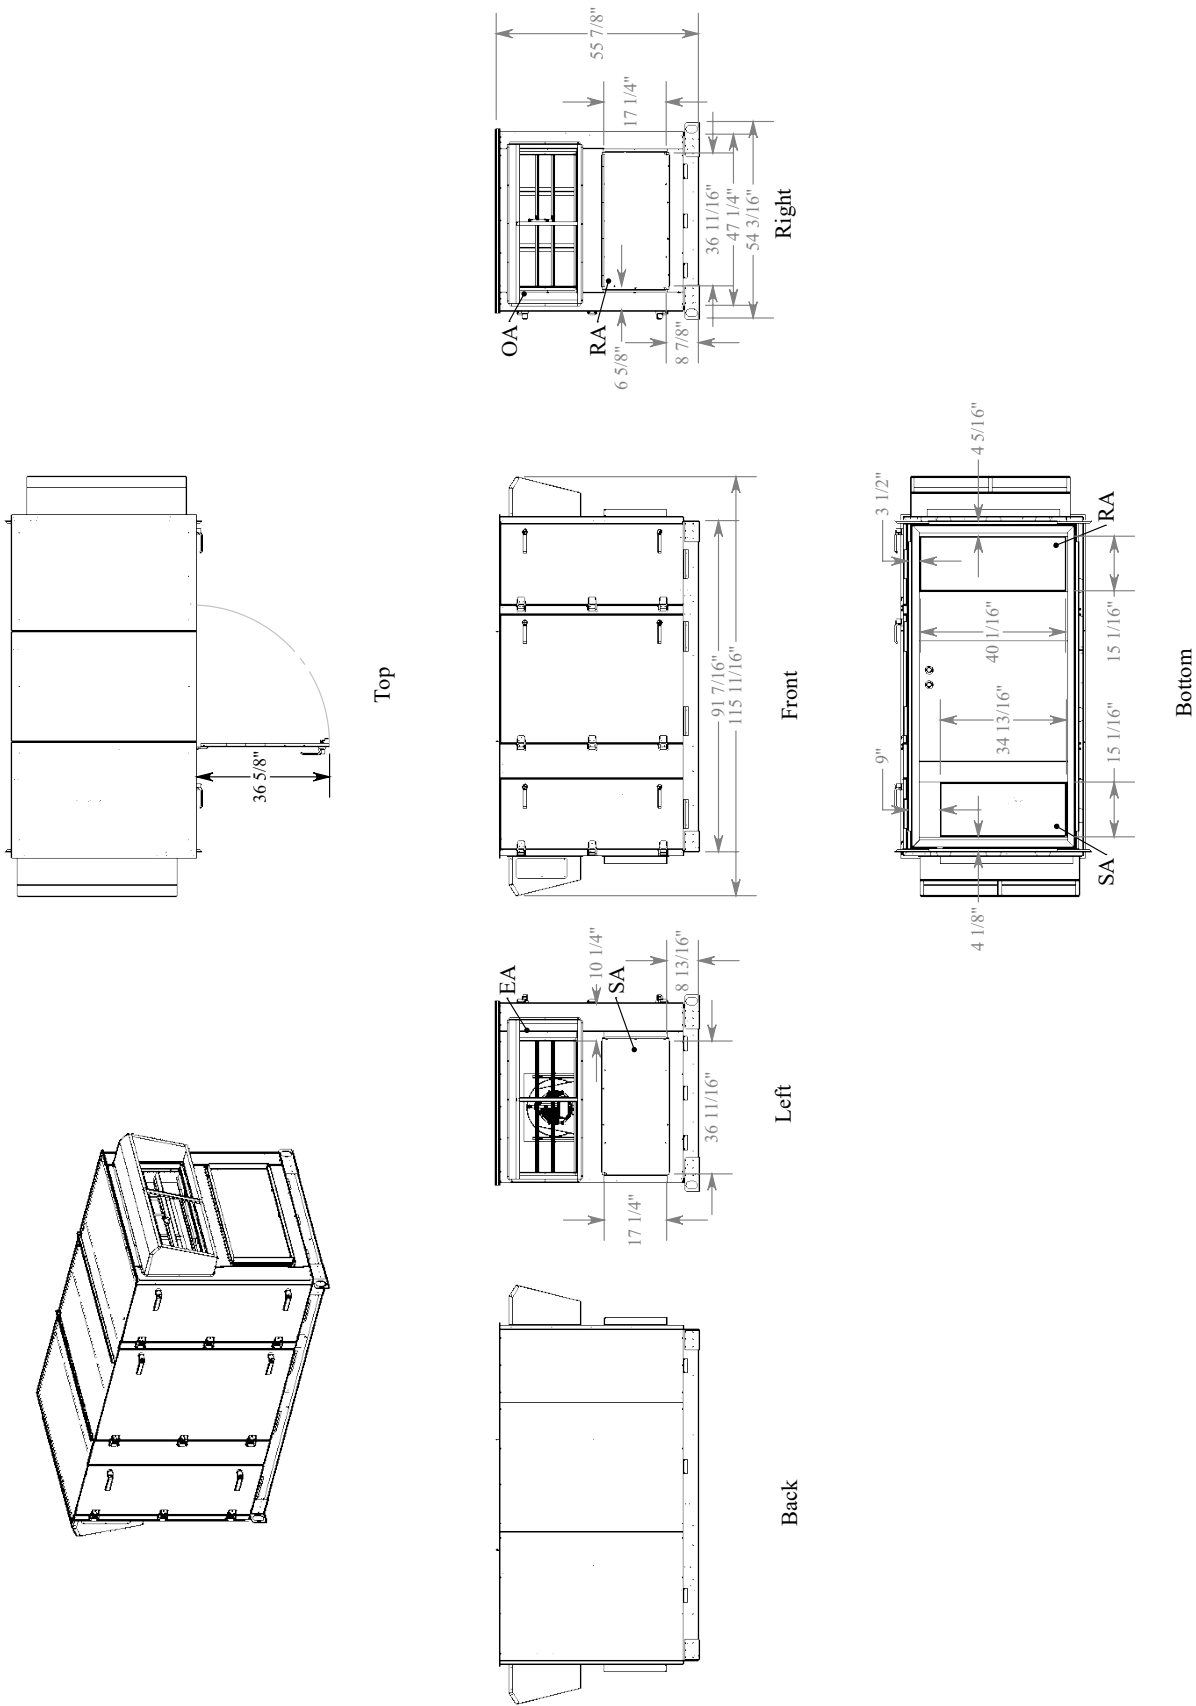


PRONTO 30: Roof Curb Dimensions - inches

PRONTO 30

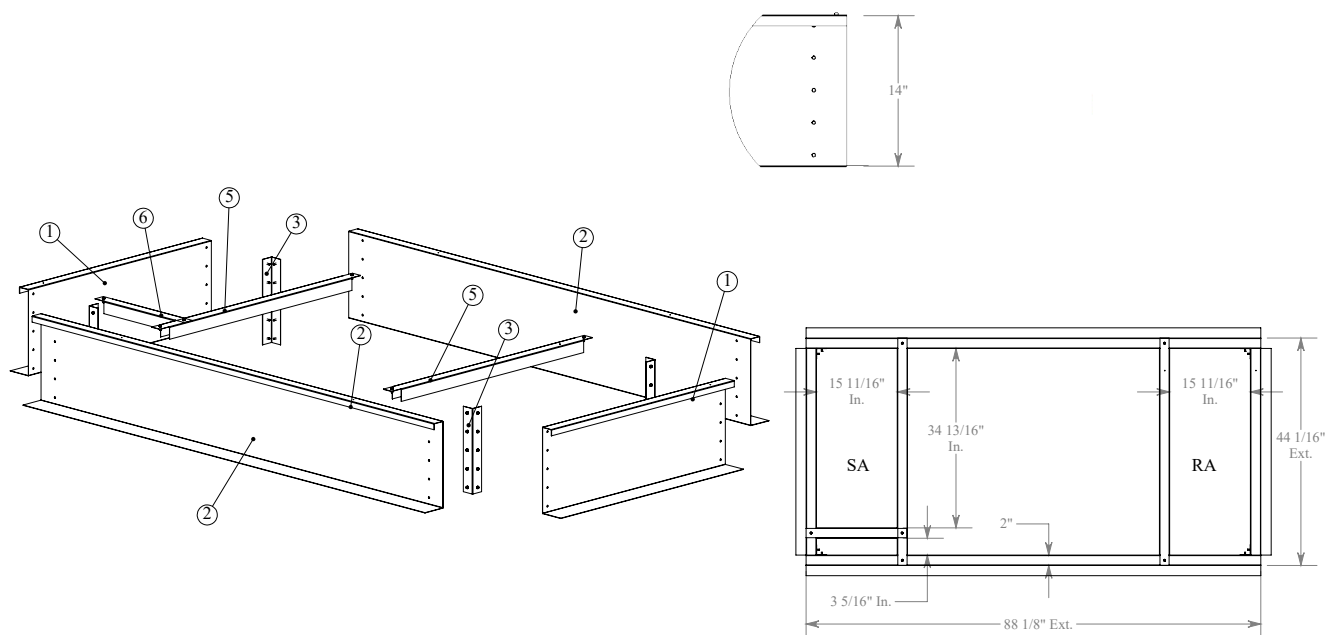

PRONTO 30: Configurations & Weights

AVAILABLE CONFIGURATIONS
1-2-5-6
1-3-4-6

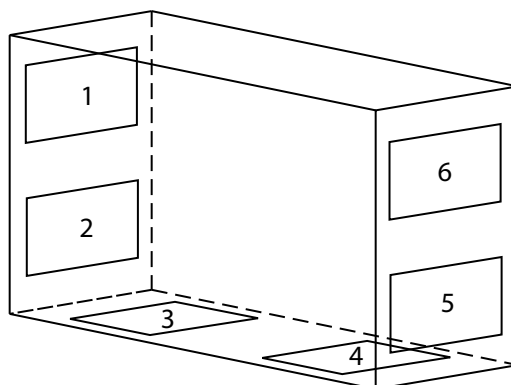

DUCT CONNECTION KEY	
1	Exhaust Air (EA)
2, 3	Supply Air (SA)
4, 5	Return Air (RA)
6	Outside Air (OA)

PRONTO 30 WEIGHTS	
Unit Weight	1600 lbs
Unit Shipping Weight	1700 lbs

For more information, contact your Aldes sales advisor, visit aldes-na.com, call 1.800.255.7749, or find us on



140323 ©2023 American ALDES Ventilation Corporation and ALDES Canada. All Rights Reserved. Reproduction or distribution, in whole or in part, of this document, in any form or by any means, without the express written consent of American ALDES

Ventilation Corporation and/or ALDES Canada, is strictly prohibited. The information contained within this document is subject to change without prior written notice.

