



C22.2 no113
UL 1812



PLATE EXCHANGER

Polymeric membrane counter-flow ERV

CASING (Standard)

Material: 24-gauge galvanized steel

Drain connections: none

Duct connections: 5" (127 mm)

Insulation: Polystyrene

Length: 32-1/8" (816 mm)

Height: 9-7/8" (251 mm)

Width: 23-1/8" (587 mm)

Weight: 53 lbs (24kg)

Exhaust Damper: Gravity

Fresh air Damper: Motorized



MOUNTING (Standard)

Ceiling mounting bracket included



ELECTRICAL & CONTROLS (Standard)

120 VAC, 60 HZ, 155 W, 2.46 A



FILTERS

(Standard)

Quantity: 1 supply, 1 exhaust

Supply Filter Type: Washable MERV 8 (P/N 607116)

Exhaust Filter Type: Washable Foam (P/N 609630)

(Optional: Sold Separately)

MERV 13 Filters (substitute on supply air circuit only)

P/N: 607117



BLOWERS & MOTORS

Two motorized impellers (forward-curved)

Auto-balancing EC motors

InspirAIR® FRESH ERV

EK120-HRX-N

117 CFM at 0.4 in.w.g



UNIT



CORE



FROST PREVENTION/CONTROL


Automatic Timed Recirculation: Cycles are controlled by a temperature sensor when the outside temperature drops below 14°F (-10°C).

WARRANTY


Limited 5 years on the cores and all covered components.

WALL CONTROLS


Low voltage dry contact (24VAC) for interlock with heating and cooling systems.



Digital Multifunction Control (#611242-FC)



LCD Electronic Multifunction Control (P/N 611227)




20/40/60 Minute Timer (P/N 611228)




Speed Control (Low/Intermittent/High)
(P/N 611229)



Mode Control (Recirculation) (P/N 611230)

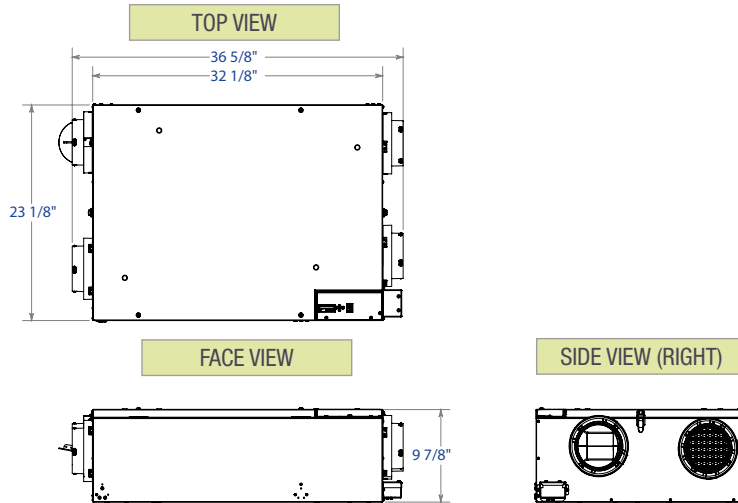

EK120-HRX: PERFORMANCE

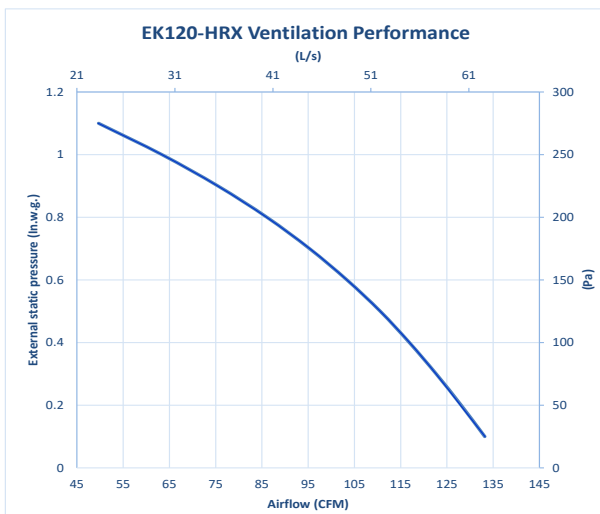

Thermal Performance – EK120-HRX-N								
Supply Temperature		Net Airflow		Power Consumed (w)	Sensible Recovery Efficiency	Adjusted Sensible Recovery Efficiency	Latent Recovery/ Moisture Transfer	Total Recovery Efficiency
°F	°C	CFM	L/s					
Heating								
32	0	50	23	27	76%	79%	73%	--
32	0	64	30	33	75%	78%	72%	--
-13	-25	66	31	62	60%	65%	65%	--
Cooling								
95	35	52	24	31	--	--	79%	73%

Project:		Architect:	
Location:		Engineer:	
Model #:		Contractor:	
Quantity:		Comments:	
Submitted By:			
Date:			

For more information, contact your Aldes sales advisor, visit aldes-na.com, call 1.800.255.7749, or find us on



©2023 American ALDES Ventilation Corporation and ALDES Canada. All Rights Reserved. Reproduction or distribution, in whole or in part, of this document, in any form or by any means, without the express written consent of American ALDES Ventilation Corporation and/or ALDES Canada, is strictly prohibited. The information contained within this document is subject to change without prior written notice.

Corporation and/or ALDES Canada, is strictly prohibited. The information contained within this document is subject to change without prior written notice.

