



CAPACITY

- Airflow: 4500-7200 CFM
- VRF combination 12.5 to 16 tons
- Refrigerant type : R410a, R32 and R454-B available
- Tested according to AHRI 410

AIR CONDITIONING/HEATING (Standard)

- Combination DX evaporator (connection with VRF unit)
- DX evaporator connection: liquid (1/2"), gas (1 1/8")
- Economizer feature with free cooling available

AUXILIARY HEATING OPTIONS

Supplemental electric heating coil with SCR modulation (36 to 54 kW)

Indirect gas-fired furnace (300 MBH or 500 MBH)

- Indirect-fire, natural gas
- SS409 steel tube
- 10:1 modulation
- 81% efficiency
- Flame detection switches

CASING (Standard)

- Double-wall enclosure
- 22-gauge galvanized steel
- White pre-painted steel exterior finish
- Access doors with quarter-turn locks
- 18-gauge galvanized steel drain pan
- Drain connections: 1" (25 mm) NPT
- Mistop component to manage possible extra condensation
- Insulation: 2" (51 mm)
- Exhaust and supply weather hoods with bird screens
- Economizer section with motorized, airtight insulated aluminum dampers for fresh, exhaust, and mixed air.

MOUNTING

- Standard platform (Standard)
- 14-inch 18-gauge steel roof curb (Option)

product code : RC-RTU-15T-01

WARRANTY

- Components covered for 2 years
- Furnace covered 1 year

COMPONENTS INSTALLED AND PRE-WIRED AT THE FACTORY

- Economizer section hood
- 36 to 54 kW electric coil with SCR modulation
- Exhaust fan and hood
- Fuse-less disconnect switch

FILTERS (Standard)

6 MERV 8 filters (16" x 20" x 2")

BLOWERS & MOTORS (Standard)

- Supply motorized impeller: 2 x 355 mm backwards inclined
- Exhaust motorized impeller: 315 mm backwards inclined
- Sealed, self-lubricating ball bearings
- High-efficiency, direct-drive EC motor

DX EVAPORATOR FROST PREVENTION/CONTROL


2 defrost options available:

- Fan speed reduction during defrost period (offtime defrost)
- Compensation by electric reheating


ELECTRICAL & CONTROLS (Standard)




- Available power supply 208V/3ph/60Hz; 460V/3ph/60Hz; 575V/3ph/60Hz
- Integrated Bacnet MSTP controller kit **product code: 699626**
- Fuse-less disconnect switch (NEMA 4)
- 24V transformer for controls
- Single point of electrical connection
- Rooftop unit with connection capabilities to Daikin, Samsung, Mitsubishi or other third-party VRFs.*

*Contact your local representative

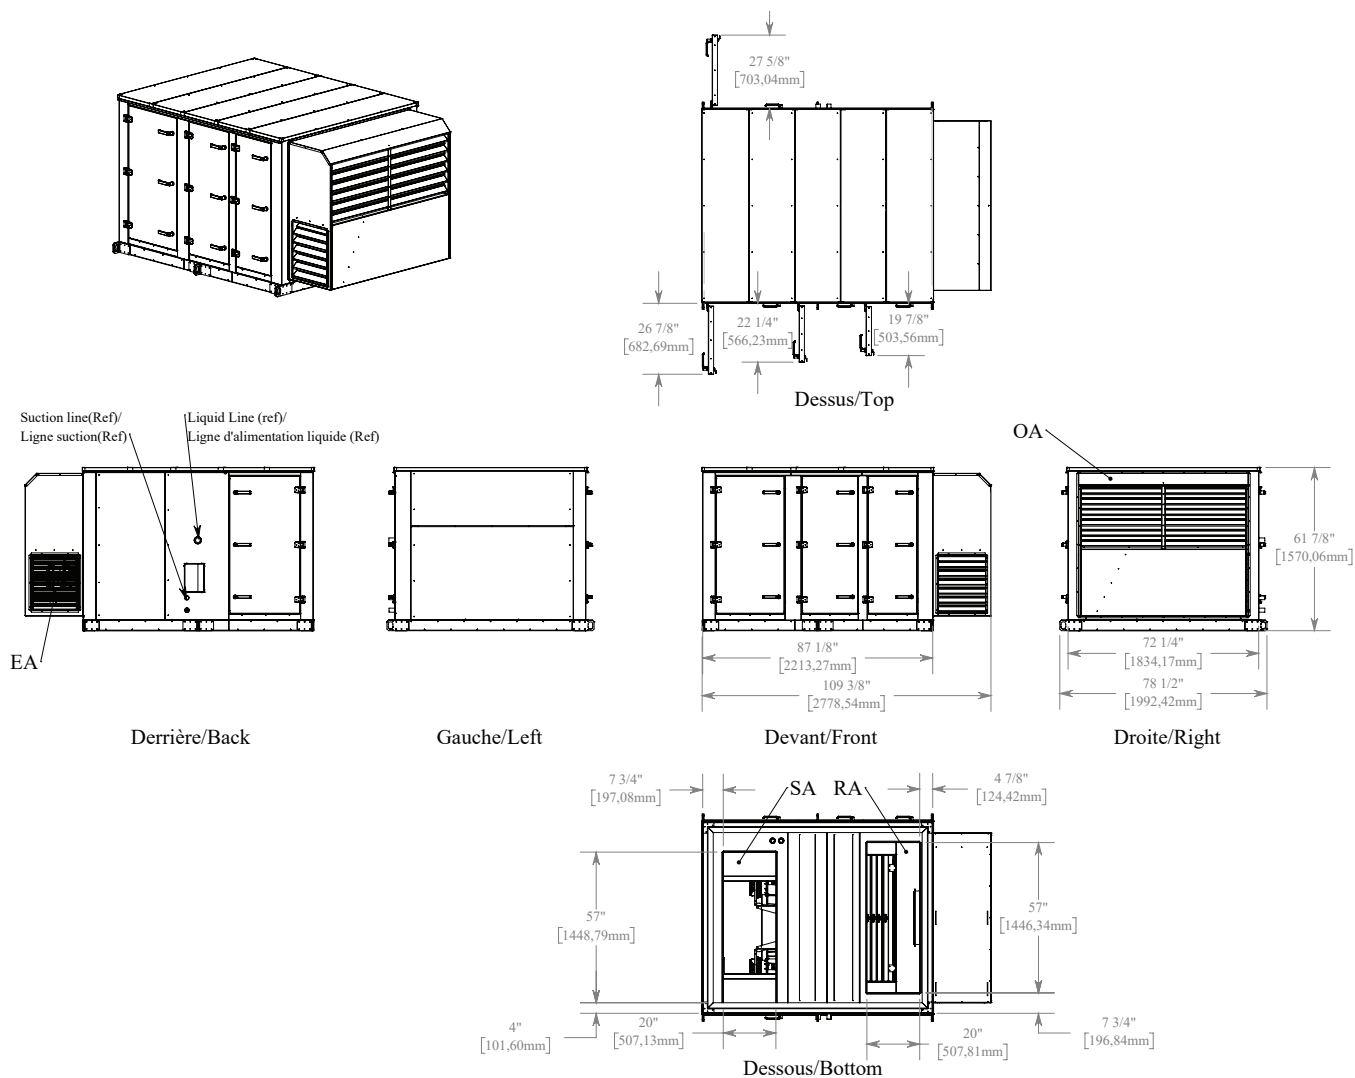


RTU_15Te : Dimensions (Standard - Inches)



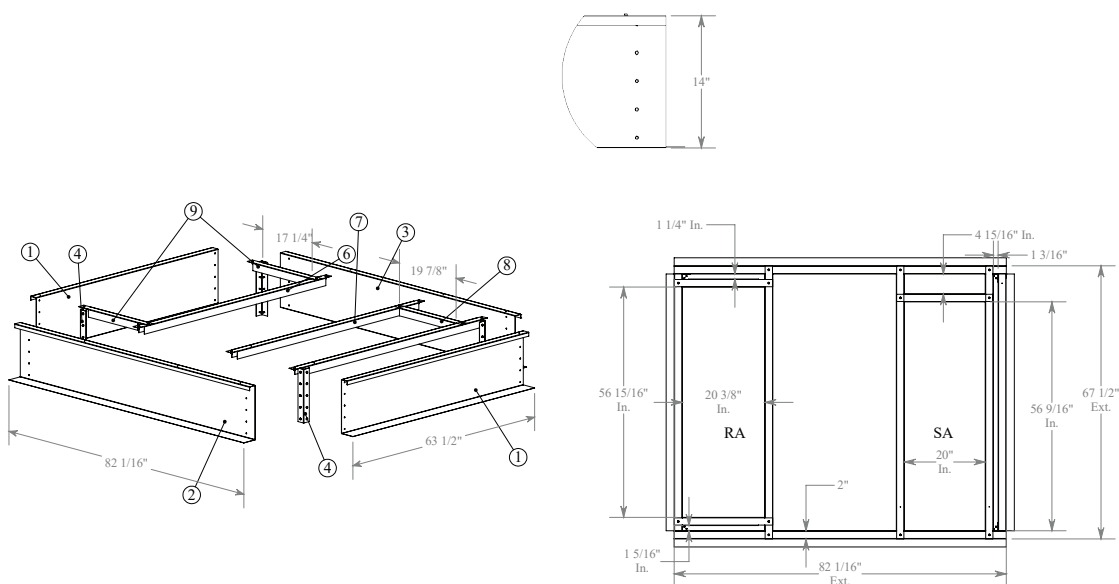


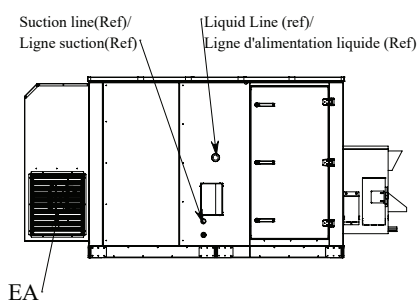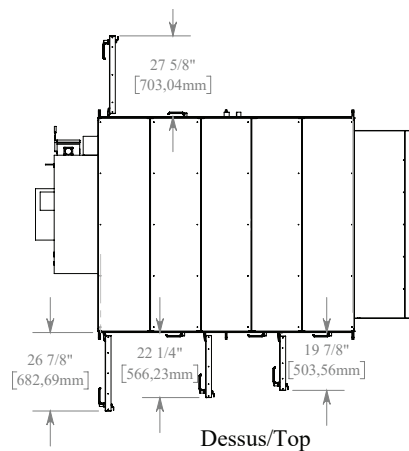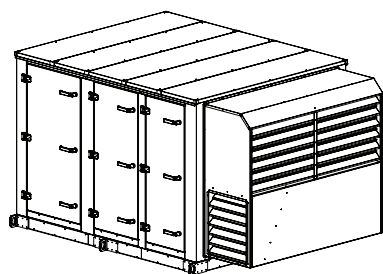


Derrière/Back




Gauche/Left

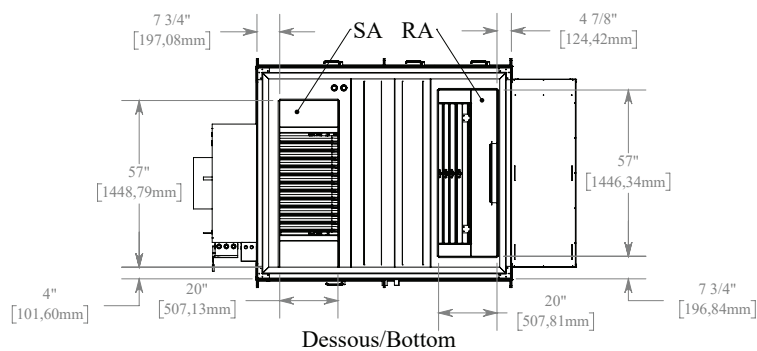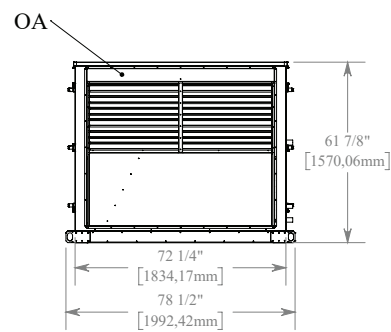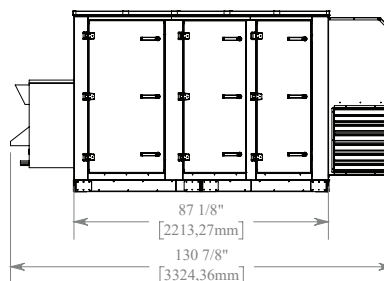

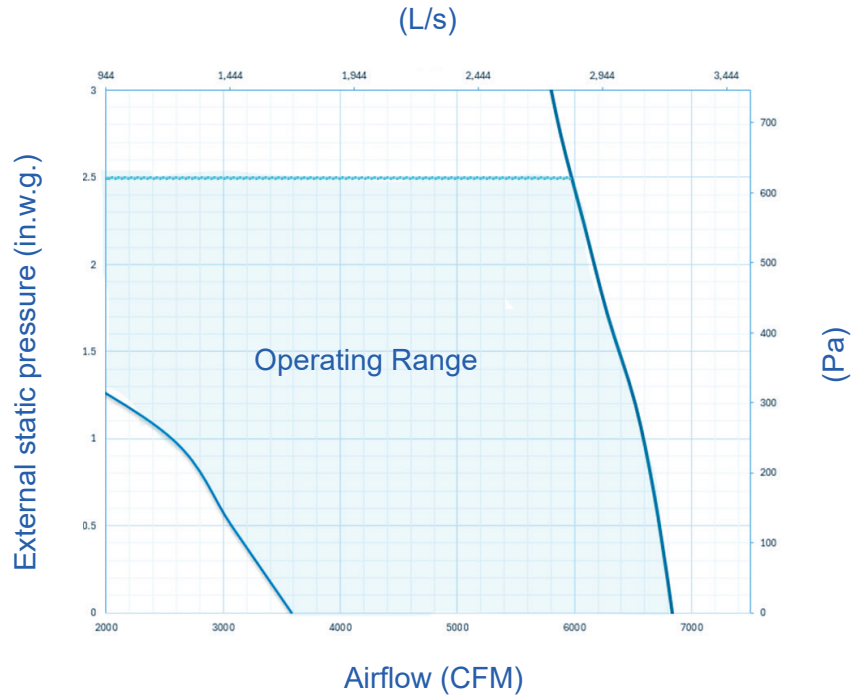

RTU_15Te : Configuration and Weight

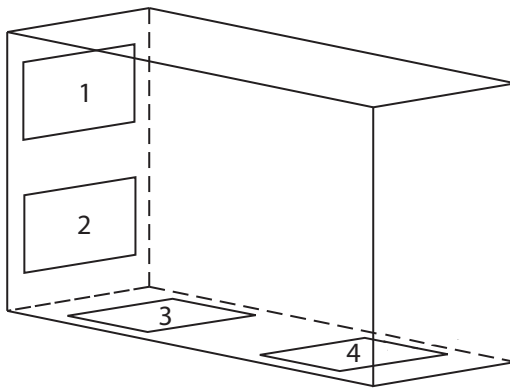

LEGEND	
1	Fresh air intake (SA)
2	Exhaust air (EA)
3	Exhaust air return (RA)
4	Fresh air distribution (SA)

RTU WEIGHT		
Unit Weight	2444 lb	
Shipping Weight	2534 lb	
Furnace Option		
Option 1 (300 MBH)	Unit Weight	2648 lb
	Shipping Weight	2738 lb
Option 2 (500 MBH)	Unit Weight	2769 lb
	Shipping Weight	2859 lb